INSTRUCTION MANUAL

REGULATED POWER SUPPLIES

LCS-C SERIES
THIS MANUAL APPLIES TO UNITS
BEARING SERIAL NO. PREFIXES A-G.

LAMBDA

LAMBDA ELECTRONICS MELVILLE, L. I., N. Y.

INSTRUCTION MANUAL

FOR

REGULATED POWER SUPPLIES

LCS-C SERIES
THIS MANUAL APPLIES TO UNITS
BEARING SERIAL NO. PREFIXES A-G.

This manual provides instructions intended for the operation of Lambda power supplies, and is not to be reproduced without the written consent of Lambda Electronics. All information contained herein applies to all LCS-C models unless otherwise specified.

LAMBDA ELECTRONICS MELVILLE, L.I., N.Y.
MAIN PLANT TELEPHONE: 516 MYrtle 4-4200

TABLE OF CONTENTS

Section		Page
	SPECIFICATIONS AND FEATURES	1
	THEORY OF OPERATION	5
	OPERATING INSTRUCTIONS	7
	Basic Mode Of Operation	7
	Connections For Operation	7
	Supply-Load Connections	7
	Operation After Protective Device Shutdown	9
	MAINTENANCE	10
	General	10
	Trouble Analysis	10
	Checking Transistors & Capacitors	10
	Printed Circuit Board Maintenance Techniques	10
	Trouble Chart	11
	Performance Checks	13
	Adjustment Of Calibration Control R13	13
	SERVICE	14
	PARTS ORDERING	14

SPECIFICATIONS AND FEATURES

Specifications apply for all models

DC OUTPUT - Voltage regulated for line and load.

TABLE I

VOLTAGE AND CURRENT

RANGES

MODEL	VOLTAGE RANGE	MAXIMUM CURRENT (AMPS) AT AMBIENT TEMPERATURE				INPUT POWER (WATTS*)
		40°C	50°C	60°C	71°C	
LCS-C-2	2±5%	9.0	8.0	6.8	5.3	165
LCS-C-5-OV	5±5%	9.0	8.0	6.8	5.3	165
LCS-C-6	6±5%	8.8	7.8	6.7	5.2	170
LCS-C-12	12±5%	6.5	6.1	5.5	4.6	180
LCS-C-15	15±5%	6.0	5.6	5.1	4.5	215
LCS-C-20	20±5%	4.2	4.0	3.5	3.0	190
LCS-C-24	24±5%	3.6	3.4	3.0	2.5	190
LCS-C-28	28±5%	3.0	2.7	2.6	2.2	190
LCS-C-36	36±5%	2.3	2.2	2.1	1.6	190
LCS-C-48	48±5%	1.8	1.7	1.6	1.3	190
LCS-C-100	100±5%	0.65	0.65	0.65	0.65	120
LCS-C-120	120±5%	0.55	0.55	0.55	0.55	120
LCS-C-150	150±5%	0.42	0.42	0.42	0.42	120
LCS-C-01	0-7	4.5	4.1	3.8	3.3	110
LCS-C-02	0-18	2.3	2.1	1.9	1.6	95
LCS-C-03	0-32	1.6	1.5	1.4	1.2	110
LCS-C-04	0-60	0.85	0.8	0.74	0.65	95
LCS-C-05	0-120	0.33	0.33	0.33	0.33	65

*With output loaded to full 40°C rating and input voltage 132 volts AC, 60Hz

Current range must be chosen to suit the appropriate maximum ambient temperature. Current ratings apply for entire voltage range.

REGULATED VOLTAGE OUTPUT

Regulation (line).....0.01 percent plus 1.0 millivolt for input variations from 105-132 or 132-105 volts AC.

Regulation (load).....0.01 percent plus 1.0 millivolt for load variations from no load to full load or full load to no load.

Remote Programming

External Resistor.....Nominal 1000 ohms/volt output

Programming Voltage...One-to-one voltage change

Ripple and Noise.....250 microvolts rms; 1 millivolt peak to peak with 57-63 Hz input

Temperature Coefficient....Output change in voltage (0.01% + 0.3 mv) /°C using an external programming resistor, less than (0.015% + 0.3 mv) /°C with internal resistor

Remote Sensing.....Provision is made for remote sensing to eliminate effect of power output lead resistance on DC regulation

AC INPUT - 105-132, 205-265 or 187-242 ("V" option) volts AC at 47-440 Hz. For input power, see table I. Ratings apply for 57-63Hz; at 47-57Hz, derate current 10% for each ambient temperature given in table I. For 63-440Hz input, consult factory.

OVERLOAD PROTECTION

Thermal.....Thermostat, resets automatically when over temperature condition is eliminated

Electrical

External.....Automatic electronic current limiting circuit, limits output current to a preset value less than 110% of 40°C current rating. Automatic current limiting protects the load and power supply when external overloads and direct shorts occur.

Internal.....Fuse F1 provides protection against internal circuit failure.

OVERVOLTAGE PROTECTION - Model LCS-C-5-OV includes a fixed built in overvoltage protection circuit which prevents damage to the load caused by excessive power supply output voltage. Overvoltage protection firing range is between 6.4 and 6.8 volts D.C.

INPUT AND OUTPUT CONNECTIONS - Terminal block on rear of chassis.

OPERATING AMBIENT TEMPERATURE RANGE AND DUTY CYCLE - Continuous duty from -20°C to 71°C ambient with corresponding load current ratings for all modes of operation.

STORAGE TEMPERATURE - (non-operating) -55°C to 85°C

CONTROLS

DC output control.....Voltage adjust control permits adjustment of DC output voltage via access hole located in nameplate

PHYSICAL DATA

Size.....3-3/16" x 4-15/16" x 9-3/8"

Weight.....10 lbs. net; 11 lbs. shipping wt.

Finish.....Grey, FED. STD. 595 No. 26081

MOUNTING - Three surfaces, each with tapped mounting holes, can be utilized for mounting this unit. All LCS-C power supplies can be mounted with Top, Front, or Right Side facing up. Top, Front, or Right Side must be in a horizontal plane. Refer to figure 12 for mounting details.

MODEL OPTIONS

"V" Option.....Standard LCS-C power supplies can be ob-obtained for 205-265 VAC, 47-440 Hz input or 187-242 VAC, 47-440 Hz input. See nameplate for AC input rating. See schematic diagram for rewiring of AC input. At 47-57Hz input derate current 10% for each ambient temperature given in table I. At 63-440 Hz input, consult factory for details of operation

"S" Option.....All fixed voltage LCS-C power supplies must be specified with the "S" option when used with the Systems Power Sequencer. On units with "S" option, resistor R20 is jumped, see schematic diagram.

ACCESSORIES

Rack Adapters.....Rack adapters LRA-4, LRA-6, LRA-7, LRA-8, LRA-10, LRA-11, LRA-12, and LRA-13, used for ruggedized mounting with or without chassis slides, are available as well as rack adapters

LRA-3 and LRA-5, which are used for simple rack installations where chassis slides are not required.

Overvoltage Protectors....Externally mounted, L-20-OV series Overvoltage Protectors are available for use with models LCS-C-6 through LCS-C-28. Use Overvoltage Protector LMOV-1 on model LCS-C-2. Use Overvoltage Protector LMOV-3 on models LCS-C-36 and LCS-C-48. On Models LCS-C-01 through LCS-C-04,use Overvoltage Protectors LHOV-4, LHOV-5, and LHOV-6.

Metering Panel.....A Systems Metering Panel SMP-3 or SMP-5 may be used in conjunction with the LCS-C power supplies. The panel mounted in rack adapters LRA-8 or as applicable LRA-10, LRA-11, and used with a Systems Cable, contains a voltmeter and an ammeter, each with three ranges and a push button selector switch. The selector switch allows monitoring of the voltage and current of any of up to 8 outputs.

Metered and Non-Metered...Metered panels MP-3, MP-5 and Non-Panels metered panels P-3, P-5 are available for use with Lambda rack adapters LRA-4, LRA-6, or LRA-7.

THEORY OF OPERATION

GENERAL

The Lambda power supply consists of an AC input circuit and transformer; a bias supply consisting of an auxiliary rectifier, and preregulator*; a main regulator circuit consisting of the main rectifier and filter, a series regulator, emitter follower driver, a current comparator*, a voltage comparator*, an amplifier*, current and voltage sensing networks and a voltage reference circuit*.

* This circuit element is part of integrated circuit (IC1) in the supply.

The circuit arrangement is shown in block diagram form, Figure10. The circuitry is discussed with reference to the block diagram and the schematic diagram.

FUNCTIONAL DESCRIPTION

Single phase input power is applied to transformer T1 through the input circuit which contains a thermostat to protect the supply against over heating.

The main rectifier, a full wave rectifier, provides the power which is filtered by capacitor C6 and, as applicable C3, and then regulated via a series regulator and delivered to the output. Half-wave auxiliary rectifier CR1 provides voltage filtered by capacitor C1 for the preregulator located in IC1. The reference element, powered by the preregulator, provides a reference voltage for the current comparator and the voltage comparator.

Constant voltage circuit operation is determined by changes in the load which cause a change in one input to the voltage comparator. A second input to comparator is a reference voltage that is developed by a constant current of 1 milliampere flowing in divider element R8. The comparator compares the output voltage change with the reference voltage resulting in an error signal at the output of the comparator.

The error signal from the comparator is then current amplified by drivers Q1 and Q2. The amplified signal from the drivers controls the voltage across the series regulators Q3, Q4, and Q7, which function as the active regulating elements in the supply.

* Current limit circuit operation for models LCS-C-2 through LCS-C-150 is determined by changes in the load. The current comparator samples load current through current sensing resistor R7. When the voltage drop across R7 increases to the preset voltage reference is determined by R6, R9, and R13, the current comparator conducts. Thus, when the output current rating of the unit is exceeded, the current comparator conducts, decreasing the current through drivers Q1 and Q2, resulting in an increase of voltage across the series regulator and a decrease of the output voltage, effectively limiting the output current to a safe value. The current limit value is determined by fixed resistors R6, R7, R9 and variable resistor R13.

When operating conditions approach short circuit, the output voltage decreases. Since the voltage determined by R13 is proportional to the output voltage, when the output voltage decreases, the amplifier is biased into turn on at lower and lower load currents until output voltage decreases to zero and current decreases to a predetermined low value.

* The following theory applies to models LCS-C-01 through LCS-C-05.

Current limit circuit operation is determined by changes in the load. When load current increases above the rated current value, the voltage drop across current limit potentiometer R13 increases causing the amplifier to turn on. With the amplifier conducting the current to driver Q1 and Q2, decreases, limiting the base current to series regulators Q3 and Q4 which results in an increase of voltage across the series regulators and a decrease of the output voltage, effectively limiting the output current to a safe value. The current limit value is determined by the factory setting of current limit potentiometer R13.

When operating conditions reach short circuit, the output voltage value decreases to zero and the current remains at the current limit value.

OV CIRCUIT, FUNCTIONAL DESCRIPTION (LCS-C-5-OV ONLY)

When the power supply output voltage increases above the overvoltage limit (6.4 to 6.8 volts), HC1 fires causing the power supply output voltage to drop.

BASIC MODE OF OPERATION

This power supply operates as a constant voltage source provided the load current does not exceed the rated value at 40°C. For continuous operation, load current must not exceed the rating for each ambient temperature and will remain limited to less than 110% of 40°C rating.

CONNECTIONS FOR OPERATION

NOTE: Make all connections to the unit before applying AC input power.

Ground Connections. The Lambda power supply can be operated either with negative or positive output terminal grounded. Both positive and negative ground connections are shown in the diagrams for all suggested output connections illustrated in this manual.

Connection Terminals. Make all connections to the supply at the terminal block on the rear of the supply. Apply input power to terminals 1 and 2; always connect the ungrounded (hot) lead to terminal 1.

The supply positive terminal is brought out to terminal 6. The supply negative terminal is borught out to terminal 4. Recommended wiring of the power supply to the load and selection of wiring is shown in figures 1 through 9. Selection of proper wiring is made on the basis of load requirements. Make all performance checks and measurements of current or voltage at the rear output terminals. Connect measuring devices directly to terminals or use the shortest leads possible.

SUPPLY LOAD CONNECTIONS

Connections For Operation as a Constant Voltage Source

The output impedance and regulation of the power supply at the load may change when using the supply as a constant voltage source and connecting leads of practical length are used. To minimize the effect of the output leads on these characteristics, remote sensing is used. Recommended types of supply-load connections with local or remote sensing are described in the following paragraphs.

Refer to figure 1 to determine voltage drop for particular cable length, wire size and current conditions. Lead lengths must be measured from supply terminals to load terminals as shown in figure 2.

Two-Wire Connection, Figure 3. The two-wire connection, with local sensing, is the connection suitable for applications with relatively constant load.

Four-Wire Connection, Figure 4. The four-wire connection with remote sensing, provides complete compensation for the DC voltage drops in the connecting cables. Sensing leads should be a twisted pair to minimize AC pick-up. A 2.5 mf, elect., capacitor may be required between output terminals and sense terminals to reduce noise pick-up.

Programmed Voltage Connections, Using External Resistor, Figure 5. Discrete voltage steps can be programmed with a resistance voltage divider valued at 1000 ohms/volt and a shorting-type switch as shown in Figure 5. When continuous voltage variations are required, use a variable resistor with the same 1000 ohms/volt ratio in place of the resistive voltage divider and shorting-type switch. Use a low temperature coefficient resistor to assure most stable operation. Before programming, adjust programming resistor for zero resistance and set voltage adjust control to the minimum rated output voltage.

As shown in figure 5, voltages can be programmed utilizing either local or remote sensing connections, as desired.

Programmed Voltage Connections Using Programming Voltage, Fig. 6. The power supply voltage output can be programmed with an externally connected programming power supply. The output voltage of the programmed supply will maintain a one-to-one ratio with the voltage of the programming supply if the output voltage control of the programmed supply is set to minimum output voltage.

The programming supply must have a reverse current capability of 1.5 ma minimum.

Alternatively, when supplies with less than 1.5 ma reverse current capability are used, a resistor capable of drawing 1.5 ma at the minimum programming voltage must be connected across the output terminals of the supply. This programming supply must be rated to handle all excess resistor current at the maximum programming voltage.

Connections For Series Operation

The voltage capability of LCS-C power supplies can be extended by series operation. A maximum of 300 volts can be connected between either the +DC or -DC terminal and chassis ground with a maximum voltage capability of 300 volts possible for model LCS-C-150.

Figure 7, and as applicable, 7A, shows the connections for either local or remote sensing in a series connection where the voltage control of each unit functions independently to control the output.

Figure 7 applies only to the LCS-C-01 through LCS-C-05 power supplies. If a common load is used, the maximum current rating of the unit with the lower current rating must not be exceeded.

Figure 7A shows the series connection applicable to the LCS-C-2 through LCS-C-150 power supplies. A diode, having a current carrying capability equal to or greater than the maximum current rating of the supply, must be used and connected as shown in figure 7A. The diode blocking voltage should be at least twice the maximum rated output voltage of the supply. See table I, of "Specifications and Features" for power supply current and voltage ratings.

Connections For Parallel Operation (Applicable only to LCS-C-01 - LCS-C-05)

The current capability of LCS-C power supplies can be extended by parallel operation of LCS-C power supplies of equal* voltage capacities.

Units "M" and "S" are shown connected for parallel operation in figures 8 and 9. One power supply designated the "M" unit controls its own output as well as the output of the second power supply, designated the "S" unit.

* For applications using supplies of unequal voltage ratings, consult factory for details of operation.

Unit S operates to regulate its current in a ratio to that of the M unit by comparing the current in its internal sampling resistor with that current sampled by the master internal sampling resistor.

CAUTION: Always set "S" unit voltage control to zero (fully CCW) during parallel operation, otherwise excessive current will flow through "M" unit voltage control.

NOTE: In order to maintain regulation specifications on model LCS-C-05, current must never fall below 0.5 ma.

OPERATION AFTER PROTECTIVE DEVICE SHUTDOWN

Thermostat Shutdown

The thermostat opens the input circuit only when the temperature of the internal heat sink exceeds a maximum safe value. The thermostat will automatically reset when the temperature of the heat sink decreases to a safe operating value. After eliminating the cause(s) for overheating and allowing time for the power supply to cool to a proper temperature, resume operation of the supply.

Fuse Shutdown

Fuses will blow when the maximum rated current value for the fuse is exceeded. Fatigue failure of fuses can occur when mechanical vibrations from the installation combine with thermally induced stresses to weaken the fuse metal. Many fuse failures are caused by a temporary condition and replacing the blown fuse will make the fuse protected circuit operative. When the LCS-C supply is used with the overvoltage protector option fuse F1 will provide load protection against internal component failure.

MAINTENANCE

GENERAL

This section describes trouble analysis routine, replacement procedures, calibration and test procedures that are useful for servicing the Lambda LCS-C power supply. A trouble chart is provided as an aid for the troubleshooter. Refer to the section on specifications and features for the minimum performance standards.

TROUBLE ANALYSIS

Whenever trouble occurs, systematically check fuse, primary power lines, external circuit elements, and external wiring for malfunction before trouble shooting the equipment. Failures and malfunctions often can be traced to simple causes such as improper jumper and supply-load connections or fuse failure due to metal fatigue.

Use the electrical schematic diagram and block diagram, figure 11, as an aid to locating trouble causes. The schematic diagram contains various circuit voltages that are averages for normal operation. Measure these voltages using the conditions for measurement specified on the schematic diagram. Use measuring probes carefully to avoid causing short circuits and damaging circuit components.

CHECKING TRANSISTORS AND CAPACITORS

Check transistors with an instrument that has a highly limited current capability. Observe proper polarity to avoid error in measurement. The forward transistor resistance is low but never zero; backward resistance is always higher than the forward resistance.

For good transistors, the forward resistance for any junction is <u>always</u> greater than zero.

Do not assume trouble is eliminated when only one part is replaced. This is especially true when one transistor fails, causing other transistors to fail. Replacing only one transistor and turning power on, before checking for additional defective components could damage the replaced component.

When soldering semi-conductor devices, wherever possible, hold the lead being soldered with a pair of pliers placed between the component and the solder joint to provide an effective heat sink.

<u>NOTE</u>: The leakage resistance obtained from a simple resistance check of a capacitor is not always an indication of a faulty capacitor. In all cases the capacitors are shunted with resistances, some of which have low values. Only a dead short is a true indication of a shorted capacitor.

PRINTED CIRCUIT BOARD MAINTENANCE TECHNIQUES

1. If foil is intact but not covered with solder, it is a good contact. Do not attempt to cover with solder.

2. Voltage measurements can be made from either side of the board. Use a needlepoint probe to penetrate to the wiring whenever a protective coating is used on the wiring. A brass probe can be soldered to an alligator clip adapted to the measuring instrument.

3. Wherever possible use a heat sink when soldering transistors.

4. Broken or damaged printed wiring is usually the result of an imperfection, strain or careless soldering. To repair small breaks, tin a short piece of hook-up wire to bridge the break, and holding the wire in place, flow solder along the length of wire so that it becomes part of the circuitry.

5. When unsoldering components from the board never pry or force loose the part; unsolder the component by using the wicking process described below:

a) Select a 3/16 inch tinned copper braid for use as a wick; if braid is not available, select AWG No. 14 or No. 16 stranded wire with 1/2 inch insulation removed.

b) Dip the wick in liquid rosin flux.

c) Place the wick onto the soldered connection and apply soldering iron onto the wick.

d) When sufficient amount of solder flows onto the wick, freeing the component, simultaneously remove iron and wick.

TROUBLE CHART

The trouble chart is intended as a guide for locating trouble causes, and is used along with the schematic diagram.

The operating conditions assumed for the trouble chart are as follows:

a) AC power of proper voltage and frequency is preset at input terminals.

b) Either positive or negative terminal is connected to chassis ground.

c) The power supply is connected for constant voltage with local sensing. See schematic; dotted lines indicate jumpers connected for local sensing operation.

TROUBLE SHOOTING CHART

Symptom	Probable Cause	Remedy
1. Zero volts DC output	OUTPUT VOLTAGE control turned fully CCW	Check OUTPUT VOLTAGE control for proper setting & correct as necessary

TROUBLE SHOOTING CHART

Symptom	Probable Cause	Remedy
1.Zero volts DC output	Short circuit across output of supply	Check load & load connections,correct as necessary
	F1 open	Replace F1,if it blows immediately, check shorted diode CR7,transistors Q1, Q2,Q3,Q4 & Q7 & capacitor C7; replace as necessary
	Series regulator section open	Check Q1 & Q2 for open, replace as necessary
	Shorted CR6 or CR7 (as applicable)	Check CR6 or CR7 for open replace as necessary
	Current sensing resistor open	Check R7 for open, R6 for short
	Aux. rectifier CR1 open	Check CR1 for open, replace as necessary
	Open CR8, CR9, or R1	Check & replace as necessary
2.Unable to adjust output voltage	Damaged OUTPUT VOLTAGE control	Check R8 for short and/or open, replace as necessary
3.High ripple at line frequency or twice line frequency & unregulated DC output	Series regulator transistors shorted	Check and replace as necessary; Q1, Q2, Q3, Q4, and Q7
	Defective main rectifier causes ripple at twice line frequency	Check for open and/or short CR2,CR3,CR4 & CR5, or as applicable CR14 and CR15
4.Same as 3,except intermitten	Foreign matter fallen into unit	Check for loose bench hardware & wire clippings that may have fallen through cover
5.High ripple at frequency other than line or twice line frequency	Oscillation due to defective component in filter network	Check for open C7,C2 & check for open and/or short in C11 & R2. Replace defective component
6.Large spikes at output	Capacitor C5, or as applicable, C4 & C14 open	Replace C5 (or C4 and C14)

PERFORMANCE CHECKS

Check the ripple and regulation of the power supply using the test connection diagram shown in figure 11. Use suggested test equipment or equivalent to obtain accurate results. Refer to Specifications and Features for minimum performance standards.

Set the differential meter, DVM (John Fluke Model 801H or equivalent) to the selected power supply operating voltage. Check the power supply load regulation accuracy while switching from the load to no-load condition. Long load leads should be a twisted pair to minimize AC pick-up.

Use a Variac to vary the line voltage from 105-132 or 132-105 volts AC and check the power supply line regulation accuracy on the DVM differential meter.

Use a VTVM, Ballantine 320 or equivalent, to measure rms ripple voltage of the power supply DC output. Use oscilloscope to measure peak-to-peak ripple voltage of the power supply DC output.

ADJUSTMENT OF CALIBRATION CONTROL R13

Whenever Q3, Q4, R6, R7, R9, R11, R13, R21, R37, or IC1 are replaced, and voltage and current indications do not reflect maximum ratings, adjust R13 as follows. The adjustment procedure requires that the power supply is removed from associated equipment, is at an ambient temperature of 25-30°C, and is stabilized and not operating.

1. Remove AC input power to the supply.

2. Break seal on wiper of R13 from resistor housing and turn to full CW position.

3. Operate power supply for constant voltage with local sensing connected as shown in figure 3, with no external load.

4.* Turn voltage adjust control until minimum rated output voltage is obtained.

5.* Apply load so that output current is 110% of 40°C rating for the unit.

6.* Using an oscilloscope, Tektronix 503 or equivalent, observe output voltage while adjusting R13 in CCW direction. Adjust R13 until output ripple begins to increase.

7.* Turn voltage adjust control until maximum rated output voltage is obtained.

8.* Increase load. Maximum attainable load current shall not exceed 130% of 40°C rating for the unit.

9.* After adjustment is completed, remove AC power input to the supply and use glyptol sealant to seal wiper of R13 to resistor housing.

10.* After sealing, check setting and repeat adjustment procedure if required.

* Perform alternate steps 4A through 9A for adjustment of R13 on models LCS-C-01 - LCS-C-05.

4A. Turn voltage adjust control until rated output is obtained.

5A. Apply load so that output current is 110% of 40°C rating for the unit.

6A. Using an oscilloscope, Tektronix 503 or equivalent, observe unit output voltage while adjusting R13 in a CCW direction. Adjust R13 until output ripple increases sharply and oscilloscope pattern changes.

7A. Place a DC ammeter of appropriate scale across output terminals 4 and 6 of the supply. The meter indication shall be a maximum of 115% of 40°C rating for the unit.

8A. After adjustment is completed, remove AC input power to the supply and use glyptol sealant to seal wiper of R13 to resistor housing.

9A. After sealing, check setting and repeat adjustment procedure if required.

SERVICE

When additional instructions are required or repair service is desired, contact the nearest Lambda office where trained personnel and complete facilities are ready to assist you.

Please include the power supply model and serial number together with complete details of the problem. On receipt of this information Lambda will supply service data or advise shipping for factory repair service.

All repairs not covered by the warranty will be billed at cost and an estimate forwarded for approval before work is started.

PARTS ORDERING

Standard components and special components used in the Lambda power supply can be obtained from the factory. In case of emergency, critical spare parts are available through any Lambda office.

The following information must be included when ordering parts:

1. Model number and serial number of power supply and purchase date.

2. Lambda part number.

3. Description of part together with circuit designation.

4. If part is not an electronic part, or is not listed, provide a description, function, and location of the part.

PARTS LIST

The electrical parts located on Lambda models LCS-C-2 — LCS-C-150 and LCS-C-01 — LCS-C-05 are listed here. Parts common to a group of models are listed first. Unique parts of individual models within the group are listed separately, by model, immediately following the group common-parts listing. In addition there are separate listings of parts for the "V" option and LMOV, LHOV, MP-3, MP-5, P-3, and P-5 accessories

COMMON PARTS
MODELS LCS-C-2—LCS-C-150 and LCS-C-01—LCS-C-05

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
C1	Cap., elect., 40 mf -10+75%, 33 vdc	CBP-40-036
C2	Cap., mylar, 0.047 mf ±10%, 200 vdc	CGL-47-018
C9	Cap., mylar, 1.0 mf ±10%, 200 vdc	CGN-10-005
C10	Cap., mylar, 0.033 mf ±10%, 400 vdc	CGL-33-009
C12, C17 thru C21	Not assigned	
CR1, CR10, CR11	Rectifier	FBL-00-030
CR12	Not assigned	
CR13	Same as CR1	
CR17	Not assigned	
CR21*	Rectifier, zener diode	FBM-Z130
CR22†	Rectifier, zener diode	FBM-Z139
CR23 thru CR27	Not assigned	
IC1*	Integrated circuit	FBT-00-031
Q6	Not assigned	
R1	Res., film, 8,660 ohms ±1%, ¼ w	DCS-87-071
R9	Res., film, 10,000 ohms ±1%, ½ w	DCT-10-046
R10*	Res., comp., 36 megohms ±5%, ¼ w	DCB-3665
R12	Res., comp., 68,000 ohms ±10%, ¼ w	DCB-6831
R14, R15	Not assigned	
R16	Res., comp., 470 ohms ±10%, ¼ w	DCB-4711
R22, R24, R25, R27 thru R36, R38, R42, R43	Not assigned	
XF1	Fuseholder	HRM-00-016

* On units with serial no. prefix A: CR21 is not used; IC1 is FBT-00-010; R10 is 68 megohms ±10%, DCB-6861.

† CR22 not used on units with serial no. prefixes A - C.

UNIQUE PARTS
MODEL LCS-C-2

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
C3	Cap., elect., 7,500 mf -10+100%, 15 vdc	CBS-75-077
C4	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C5	Not assigned	
C6	Same as C3	
C7	Cap., elect., 800 mf -10+100%, 15 vdc	CBR-80-099
C8	Not assigned	
C11*	Cap., mylar, 0.0033 mf ±10%, 200 vdc	CGK-33-003
C13*	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Same as C4	
C15*	Cap., tant., 2.5 mf -10+75%, 100 vdc	CBN-25-010
C16	Not assigned	
C22	Same as C4	
CR2 thru CR7	Not assigned	
CR8	Rectifier	FBL-00-030
CR9	Not assigned	
CR14, CR15	Rectifier	FBL-00-054
CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 20A, 8AG, NORM-BLO	FFR-20-000
Q1,* Q2*	Transistor, NPN	FBN-L110
Q3,* Q4*	Transistor, NPN	FBN-L169
Q5	Not assigned	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 5,600 ohms ±5%, 1 w	DGB-5625
R4	Res., comp., 820 ohms ±10%, ½ w	DEB-8211
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.166 ohm ±5%, 5 w	DFM-17-071
R8	Res., var., ww or cermet, 2,000 ohms ±10%, ¾ w	DNS-20-034
R11	Same as R7	

UNIQUE PARTS (Cont.)

MODEL LCS-C-2 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 1,600 ohms ±5%, ½ w	DCS-16-015
R21	Res., film, 10,000 ohms ±5%, ½ w	DCT-10-008
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39, R40	Not assigned	
R41,* R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-148-030
T1	Transformer	ABA-LCSC-2

* On units with serial no. prefixes A - D: C11 is 0.0068 mf, CGK-68-001; C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2 is 150 ohms, DCB-1511; R5 is 330 ohms ±10%, DCB-3311; R26, R41, R42, R44, R45, R46 are not used; C13, Q1 are only used on these units.

MODEL LCS-C-5-OV

C3	Cap., elect., 7,500 mf -10+100%, 15 vdc	CBS-75-077
C4	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C5	Not assigned	
C6	Same as C3	
C7	Cap., elect., 800 mf -10+100%, 15 vdc	CBR-80-099
C8†	Cap., elect., 10 mf ±20%, 10 vdc	CBP-10-027
C11*	Cap., mylar, 0.0033 mf ±10%, 200 vdc	CGK-33-003
C13*	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Same as C4	
C15*	Cap., tant., 2.5 mf -15+75%, 100 vdc	CBN-25-010
C16	Not assigned	
C22	Same as C4	
CR2 thru CR7	Not assigned	
CR8	Rectifier	FBL-00-030
CR9	Not assigned	
CR14, CR15	Rectifier	FBL-00-054
CR16, CR18 thru CR20	Not assigned	

UNIQUE PARTS (Cont.)

MODEL LCS-C-5-OV (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
CR28†	Rectifier, zener diode	FBM-Z140
F1	Fuse, 20 A, 8 AG, NORM-BLO	FFR-20-000
HC1†	Hybrid circuit	L-12-OV-5
Q1,* Q2*	Transistor, NPN	FBN-L110
Q3,* Q4*	Transistor, NPN	FBN-L169
Q5	Not assigned	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 5,600 ohms ±5%, 1 w	DGB-5625
R4	Res., comp., 1,500 ohms ±10%, 1 w	DGB-1521
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.166 ohm ±5%, 5 w	DFM-17-071
R8	Res., var., ww or cermet, 5,000 ohms ±10%, ¾ w	DNS-50-036
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 3,600 ohms ±5%, ½ w	DCS-36-017
R21	Res., film, 24,000 ohms ±5%, ½ w	DCT-24-031
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39	Not assigned	
R40†	Res., comp., 100 ohms ±10%, ¼ w	DCB-1011
R41,* R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-148-030
SCR1*	Rectifier, silicon controlled	FBP-00-036
T1	Transformer	ABA-LCSC-5

* On units with serial no. prefixes A - D: C11 is 0.0068 mf, CGK-68-001; C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2 is 150 ohms, DCB-1511; R5 is 330 ohms ±10%, DCB-3311; R26, R41, R42, R44, R45, R46 are not used; C13, Q1 are only used on these units.

† C8, CR28, R40, SCR1 only used on units with serial no. prefixes A - E. HC1 not used on units with serial no. prefixes A - E.

UNIQUE PARTS (Cont.)

MODEL LCS-C-6

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
C3	Cap., elect., 7,500 mf -10+100%, 15 vdc	CBS-75-077
C4	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C5	Not assigned	
C6	Same as C3	
C7	Cap., elect., 600 mf -10+100%, 30 vdc	CBR-60-100
C8	Not assigned	
C11*	Cap., mylar, 0.0033 ±10%, 200 vdc	CGK-33-003
C13*	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Same as C4	
C15*	Cap., tant., 2,5 mf -15+75%, 100 vdc	CBN-25-010
C16	Not assigned	
C22	Same as C4	
CR2 thru CR7	Not assigned	
CR8	Rectifier	FBL-00-030
CR9	Not assigned	
CR14, CR15	Rectifier	FBL-00-054
CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 20 A, 8 AG, NORM-BLO	FFR-20-000
Q1,* Q2*	Transistor, NPN	FBN-L110
Q3,* Q4*	Transistor, NPN	FBN-L169
Q5	Not assigned	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 5,600 ohms ±5%, 1 w	DGB-5625
R4	Res., comp., 1,800 ohms ±10%, 1 w	DGB-1821
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.166 ohm ±5%, 5 w	DFM-17-071
R8	Res., var., ww or cermet, 5,000 ohms ±10%, ¾ w	DNS-50-036
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 3,600 ohms ±5%, ½ w	DCS-36-017
R21	Res., film, 24,000 ohms ±5%, ½ w	DCT-24-031
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39	Not assigned	

UNIQUE PARTS (Cont.)

MODEL LCS-C-6 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R40	Not assigned	
R41*, R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-148-030
T1	Transformer	ABA-LCSC-6

* On units with serial no. prefixes A - D: C11 is 0.0068 mf, CGK 68-001; C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2 is 150 ohms, DCB-1511; R5 is 330 ohms ±10%, DCB-3311; R26, R41, R42, R44, R45, R46 are not used; C13, Q1 are only used on these units.

MODEL LCS-C-12

C3	Cap., elect., 5,100 mf -10+100%, 30 vdc	CBS-51-088
C4	Not assigned	
C5	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C6	Same as C3	
C7	Cap., elect., 600 mf -10+100%, 30 vdc	CBR-60-100
C8	Not assigned	
C11	Cap., mylar, 0.0068 mf ±10%, 200 vdc	CGK-68-001
C13*	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Not assigned	
C15*	Cap., tant., 2.5 mf -15+75%, 100 vdc	CBN-25-010
C16	Not assigned	
C22	Same as C5	
CR2 thru CR5	Rectifier	FBL-00-054
CR6, CR7	Not assigned	
CR8	Rectifier	FBL-00-030
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 15 A, 8 AG, NORM-BLO	FFR-15-000
Q1,* Q2*	Transistor, NPN	FBN-L113
Q3,* Q4*	Transistor, NPN	FBN-L169
Q5	Not assigned	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 5,600 ohms ±5%, 1 w	DGB-5625
R4	Res., comp., 3,900 ohms ±10%, 1 w	DGB-3921

UNIQUE PARTS (Cont.)
MODEL LCS-C-12 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.21 ohm ±5%, 5 w	DFM-21-072
R8	Res., var., ww or cermet, 10,000 ohms ±10%, ¾ w	DNT-10-045
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 9,100 ohms ±5%, ½ w	DCS-91-025
R21	Res., film, 100,000 ohms ±1%, ¼ w	DCV-10-027
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39, R40	Not assigned	
R41,* R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-155-020
T1	Transformer	ABA-LCSC-12

* On units with serial no prefixes A - D: C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2, R5 are 330 ohms ±10%, DCB-3311; R26, R41, R42, R45, R46 are not used; C13, Q1 are only used on these units.

MODEL LCS-C-15

C3	Cap., elect., 5,100 mf -10+100%, 30 vdc	CBS-51-088
C4	Not assigned	
C5	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C6	Same as C3	
C7	Cap., elect., 600 mf -10+100%, 30 vdc	CBR-60-100
C8	Not assigned	
C11	Cap., mylar, 0.0068 mf ±10%, 200 vdc	CGK-68-001
C13*	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Not assigned	
C15	Cap., tant., 2.5 mf -15+75%, 100 vdc	CBN-25-010
C16	Not assigned	
C22	Same as C5	
CR2 thru CR5	Rectifier	FBL-00-054

UNIQUE PARTS (Cont.)
MODEL LCS-C-15 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
CR6, CR7	Not assigned	
CR8	Rectifier	FBL-00-030
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 15 A, 8 AG, NORM-BLO	FFR-15-000
Q1,* Q2*	Transistor, NPN	FBN-L113
Q3,* Q4*	Transistor, NPN	FBN-L169
Q5	Not assigned	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 5,600 ohms ±5%, 1 w	DGB-5625
R4	Res., comp., 3,900 ohms ±10%, 1 w	DGB-3921
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.21 ohm ±5%, 5 w	DFM-21-072
R8	Res., var., ww or cermet, 10,000 ohms ±10%, ¾ w	DNT-10-045
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 9,100 ohms ±5%, ½ w	DCS-91-025
R21	Res., film, 100,000 ohms ±1%, ¼ w	DCV-10-027
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39, R40	Not assigned	
R41,* R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-155-020
T1	Transformer	ABA-LCSC-15

* On units with serial no. prefixes A - D: C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2, R5 are 330 ohms ±10%, DCB-3311; R26, R41, R42, R44, R45, R46, are not used; C13, Q1 are only used on these units.

UNIQUE PARTS (Cont.)

MODEL LCS-C-20

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
C3	Cap., elect., 2,700 mf -10+100%, 50 vdc	CBS-27-089
C4	Not assigned	
C5	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C6	Same as C3	
C7	Cap., elect., 300 mf -10+100%, 50 vdc	CBR-30-101
C8	Not assigned	
C11	Cap., mylar, 0.0068 mf ±10%, 200 vdc	CGK-68-001
C13*	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Not assigned	
C15*	Cap., tant., 2.5 mf -15+75%, 100 vdc	CBN-25-010
C16	Not assigned	
CR2 thru CR5	Rectifier	FBL-00-054
CR6, CR7	Not assigned	
CR8	Rectifier	FBL-00-030
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 15 A, 8 AG, NORM-BLO	FFR-15-000
Q1,* Q2*	Transistor, NPN	FBN-L109
Q3,* Q4*	Transistor, NPN	FBN-L170
Q5	Not assigned	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 10,000 ohms ±10%, 1 w	DGB-1031
R4	Res., comp., 4,700 ohms ±10%, 1 w	DGB-4721
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.88 ohm ±2%, 3 w	DFM-88-063
R8	Res., var., ww or cermet, 20,000 ohms ±10%, ¾ w	DNT-20-010
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 15,000 ohms ±2%, ½ w	DCT-15-013
R21	Res., film, 100,000 ohms ±1%, ¼ w	DCV-10-027
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	

UNIQUE PARTS (Cont.)

MODEL LCS-C-20 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R39, R40	Not assigned	
R41,* R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-148-030
T1	Transformer	ABA-LCSC-20

* On units with serial no. prefixes A - D: C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2, R5 are 330 ohms ±10%, DCB-3311; R26, R41, R42, R44, R45, R46 are not used; C13, Q1 are only used on these units.

MODEL LCS-C-24

C3	Cap., elect., 2,700 mf -10+100%, 50 vdc	CBS-27-089
C4	Not assigned	
C5	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C6	Same as C3	
C7	Cap., elect., 300 mf -10+100%, 50 vdc	CBR-30-101
C8	Not assigned	
C11	Cap., mylar, 0.0068 mf ±10%, 200 vdc	CGK-68-001
C13*	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Not assigned	
C15*	Cap., tant., 2.5 mf -15+75%, 100 vdc	CBN-25-010
C16	Not assigned	
CR2 thru CR5	Rectifier	FBL-00-054
CR6, CR7	Not assigned	
CR8	Rectifier	FBL-00-030
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 10 A, 8 AG, NORM-BLO	FFR-10-000
Q1,* Q2*	Transistor, NPN	FBN-L109
Q3,* Q4*	Transistor, NPN	FBN-L170
Q5	Not assigned	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 10,000 ohms ±10%, 1 w	DGB-1031
R4	Res., comp., 12,000 ohms ±10%, 1 w	DGB-1231
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825

UNIQUE PARTS (Cont.)

MODEL LCS-C-24 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.39 ohm ±5%, 3 w	DFM-39-043
R8	Res., var., ww or cermet, 20,000 ohms ±10%, ¾ w	DNT-20-010
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 15,000 ohms ±2%, ½ w	DCT-15-013
R21	Res., film, 100,000 ohms ±1%, ¼ w	DCV-10-027
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39, R40	Not assigned	
R41,* R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-148-030
T1	Transformer	ABA-LCSC-24

* On units with serial no. prefixes A - D: C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2, R5 are 330 ohms ±10%, DCB-3311; R26, R41, R42, R44, R45, R46 are not used. C13, Q1 are only used on these units.

MODEL LCS-C-28

C3	Cap., elect., 1,600 mf -10+100%, 60 vdc	CBS-16-074
C4	Not assigned	
C5	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C6	Same as C3	
C7	Cap., elect., 300 mf -10+100%, 50 vdc	CBR-30-101
C8	Not assigned	
C11	Cap., mylar, 0.0068 mf ±10%, 200 vdc	CGK-68-001
C13*	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Not assigned	
C15*	Cap., tant., 2.5 mf -15+75%, 100 vdc	CBN-25-010
C16	Not assigned	
CR2 thru CR5	Rectifier	FBL-00-054
CR6, CR7	Not assigned	

UNIQUE PARTS (Cont.)

MODEL LCS-C-28 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
CR8	Rectifier	FBL-00-030
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 10 A, 8 AG NORM-BLO	FFR-10-000
Q1,* Q2*	Transistor, NPN	FBN-L109
Q3,* Q4*	Transistor, NPN	FBN-L170
Q5	Not assigned	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 10,000 ohms ±10%, 1 w	DGB-1031
R4	Res., comp., 12,000 ohms ±10%, 1 w	DGB-1231
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.50 ohm ±5%, 3 w	DFM-50-073
R8	Res., var., ww or cermet, 20,000 ohms ±10%, ¾ w	DNT-20-010
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 24,000 ohms ±5%, ½ w	DCT-24-031
R21	Res., film, 120,000 ohms ±1%, ½ w	DCV-12-019
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39, R40	Not assigned	
R41,* R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-148-030
T1	Transformer	ABA-LCSC-28

* On units with serial no. prefixes A - D: C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2, R5 are 330 ohms ±10%, DCB-3311; R26, R41, R42, R44, R45, R46 are not used. C13, Q1 are only used on these units.

UNIQUE PARTS (Cont.)

MODEL LCS-C-36

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
C3, C4	Not assigned	
C5	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C6	Cap., elect., 1,100 mf -10+100%, 75 vdc	CBS-11-090
C7	Cap., elect., 160 mf -10+100%, 60 vdc	CBR-16-102
C8	Not assigned	
C11	Cap., mylar, 0.0068 mf ±10%, 200 vdc	CGK-68-001
C13	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Not assigned	
C15	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C16	Not assigned	
CR2 thru CR5	Rectifier	FBL-00-054
CR6, CR7	Not assigned	
CR8	Rectifier	FBL-00-030
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 10 A, 8 AG NORM-BLO	FFR-10-000
Q1	Transistor, NPN	FBN-L109
Q2 thru Q4	Transistor, NPN	FBN-36487
Q5	Not assigned	
Q7	Same as Q2	
R2	Res., comp., 330 ohms ±10%, ¼ w	DCB-3311
R3	Res., comp., 10,000 ohms ±10%, 1 w	DGB-1031
R4	Res., comp., 12,000 ohms ±10%, 1 w	DGB-1231
R5	Same as R2	
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.66 ohm ±5%, 3 w	DFM-66-059
R8	Res., var., ww or cermet, 23,000 ohms ±10%, ¾ w	DNT-23-072
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 24,000 ohms ±5%, ½ w	DCT-24-031
R21	Res., film, 120,000 ohms ±1%, ½ w	DCV-12-019
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26	Not assigned	
R37	Same as R7	
R39	Not assigned (printed circuit board "A")	
R39A	Not assigned (terminal board "E")	

UNIQUE PARTS (Cont.)

MODEL LCS-C-36 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R40, R41	Not assigned	
S1	Thermostat	FKA-148-030
T1	Transformer	ABA-LCSC-36

MODEL LCS-C-48

C3	Cap., elect., 400 mf -10+100%, 100 vdc	CBR-40-044
C4	Not assigned	
C5	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C6	Same as C3	
C7	Cap., elect., 60 mf -10+100%, 100 vdc	CBP-60-051
C8	Not assigned	
C11	Cap., mylar, 0.022 mf ±10%, 200 vdc	CGL-22-001
C13	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Not assigned	
C15	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C16	Same as C7	
CR2 thru CR5	Rectifier	FBL-00-054
CR6, CR7	Not assigned	
CR8	Rectifier	FBL-00-036
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 5 A, 8 AG, NORM-BLO	FFR-05-000
Q1	Transistor, NPN	FBN-L108
Q2 thru Q4	Transistor, NPN	FBN-35902
Q5	Not assigned	
Q7	Same as Q2	
R2	Res., comp., 470 ohms ±10%, ¼ w	DCB-4711
R3	Res., comp., 27,000 ohms +10%, 1 w	DGB-2731
R4	Res., ww, 13,000 ohms ±3%, 5 w	DFT-13-036
R5	Res., comp., 330 ohms ±10%, ¼ w	DCB-3311
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 0.8 ohm ±2%, 3 w	DFM-80-062
R8	Res., var., ww or cermet, 23,000 ohms ±10%, ¾ w	DNT-23-072
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	

UNIQUE PARTS (Cont.)

MODEL LCS-C-48 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R20	Res., film, 39,000 ohms ±5%, ½ w	DCT-39-015
R21	Res., film, 200,000 ohms ±1%, ¼ w	DCV-20-028
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26	Not assigned	
R37	Res., ww, 0.8 ohm ±2%, 3 w	DFM-80-062
R39	Not assigned (pinted circuit board "A")	
R39A	Not assigned (terminal board "E")	
R40, R41	Not assigned	
S1	Thermostat	FKA-155-020
T1	Transformer	ABA-LCSC-48

MODEL LCS-C-100

C3, C4	Not assigned	
C5	Cap., mylar, 0.033 mf ±10%, 400 vdc	CGL-33-009
C6	Cap., elect., 240 mf -10+100%, 200 vdc	CBR-24-033
C7	Cap., elect., 39 mf -10+100%, 200 vdc	CBP-39-050
C8	Not assigned	
C11	Cap., mylar, 0.0047 mf ±10%, 200 vdc	CGK-47-002
C13, C14	Not assigned	
C15	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C16	Not assigned	
CR2 thru CR5	Rectifier	FBL-00-033
CR6, CR7	Not assigned	
CR8	Same as CR2	
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 5 A, 8 AG NORM-BLO	FFR-05-000
Q1	Transistor, NPN	FBN-L115
Q2	Transistor, NPN	FBN-L147
Q3, Q4	Transistor, NPN	FBN-38982
Q5	Not assigned	
Q7	Same as Q3	
R2	Res., comp., 100 ohms ±10%, ¼ w	DCB-1011
R3	Res., comp., 100,000 ohms ±10%, 1 w	DGB-1041
R4	Res., ww, 40,000 ohms ±5%, 5 w	DFT-40-047
R5	Res., comp., 1,200 ohms ±10%, ¼ w	DCB-1221
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 2.3 ohms ±2%, 3 w	DFN-23-077
R8	Res., var., cermet, 75,000 ohms ±10%, 0.75 w	DRT-75-010

UNIQUE PARTS (Cont.)

MODEL LCS-C-100 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 91,000 ohms ±5%, ½ w	DCT-91-055
R21	Res., film, 432,000 ohms ±1%, ½ w	DCV-43-024
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26	Not assigned	
R37	Same as R7	
R39	Not assigned (printed circuit board "A")	
R39A	Not assigned (terminal board "E")	
R40, R41	Not assigned	
S1	Thermostat	FKA-137-014
T1	Transformer	ABA-LCSC-100

MODEL LCS-C-120

C3, C4	Not assigned	
C5	Cap., mylar, 0.033 mf ±10%, 400 vdc	CGL-33-009
C6	Cap., elect., 240 mf -10+100%, 200 vdc	CBR-24-033
C7	Cap., elect., 39 mf -10+100%, 200 vdc	CBP-39-050
C8	Not assigned	
C11	Cap., mylar., 0.0047 mf ±10%, 200 vdc	CGK-47-002
C13, C14	Not assigned	
C15	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C16	Not assigned	
CR2 thru CR5	Rectifier	FBL-00-033
CR6, CR7	Not assigned	
CR8	Same as CR2	
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 1½ A, 8 AG, NORM-BLO	FFR-01-500
Q1	Transistor, NPN	FBN-L115
Q2	Transistor, NPN	FBN-L147
Q3, Q4	Transistor, NPN	FBN-38982
Q5	Not assigned	
Q7	Same as Q3	
R2	Res., comp., 100 ohms ±10%, ¼ w	DCB-1011
R3	Res., comp., 100,000 ohms ±10%, 1 w	DGB-1041
R4	Res., ww, 40,000 ohms ±5%, 5 w	DFR-40-047

UNIQUE PARTS (Cont.)

MODEL LCS-C-120 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R5	Res., comp., 1,200 ohms ±10%, ¼ w	DCB-1221
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 2.7 ohms ±2%, 3w	DFN-27-053
R8	Res., var., cermet, 75,000 ohms ±10%, 0.75 w	DRT-75-010
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 91,000 ohms ±5%, ½ w	DCT-91-055
R21	Res., film, 432,000 ohms ±1%, ½ w	DCV-43-024
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26	Not assigned	
R37	Same as R7	
R39	Not assigned (printed circuit board "A")	
R39A	Not assigned (terminal board "E")	
R40, R41	Not assigned	
S1	Thermostat	FKA-124-013
T1	Transformer	ABA-LCSC-120

MODEL LCS-C-150

C3, C4	Not assigned	
C5	Cap., mylar, 0.033 mf ±10%, 400 vdc	CGL-33-009
C6	Cap., elect., 200 mf -10+100%, 250 vdc	CBR-20-045
C7	Cap., elect., 300 mf -10+100%, 250 vdc	CBP-30-017
C8	Not assigned	
C11	Cap., mylar, 0.0022 mf ±10%, 200 vdc	CGK-22-008
C13, C14	Not assigned	
C15	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C16	Not assigned	
C22	Cap., ceramic, 240 pf ±20%, 1000 vdc	CDJ-24-001
CR2 thru CR5	Rectifier	FBL-00-033
CR6, CR7	Not assigned	
CR8	Same as CR2	
CR9, CR14 thru CR16, CR18 thru CR20	Not assigned	
F1	Fuse, 1½ A, 8 AG, NORM-BLO	FFR-01-500
Q1	Transistor, NPN	FBN-L115
Q2	Transistor, NPN	FBN-L147

UNIQUE PARTS (Cont.)

MODEL LCS-C-150 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
Q3, Q4	Transistor, NPN	FBN-38982
Q5	Not assigned	
Q7	Same as Q3	
R2	Res., comp., 220 ohms ±10%, ¼ w	DCB-2211
R3	Res., comp., 100,000 ohms ±10%, 1 w	DGB-1041
R4	Res., ww, 40,000 ohms ±5%, 5 w	DFT-40-047
R5	Res., comp., 1,200 ohms ±10%, ¼ w	DCB-1221
R6	Res., comp., 47 ohms ±10%, ¼ w	DCB-4701
R7	Res., ww, 3.5 ohms ±2%, 3 w	DFN-35-047
R8	Res., var., cermet, 75,000 ohms ±10%, 0.75 w	DRT-75-010
R11	Same as R7	
R13	Res., var., ww, 5,000 ohms ±10%, 1½ w	DNS-50-086
R17 thru R19	Not assigned	
R20	Res., film, 120,000 ohms ±1%, ½ w	DCV-12-019
R21	Res., film, 432,000 ohms ±1%, ½ w	DCV-43-024
R23	Res., comp., 4,700 ohms ±10%, ¼ w	DCB-4721
R26	Not assigned	
R37	Same as R7	
R39	Not assigned (printed circuit board "A")	
R39A	Not assigned (terminal board "E")	
R40, R41	Not assigned	
S1	Thermostat	FKA-124-013
T1	Transformer	ABA-LCSC-150

MODEL LCS-C-01

C3	Not assigned	
C4	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C5	Not assigned	
C6	Cap., elect., 5,100 mf -10+100%, 30 vdc	CBS-51-088
C7	Cap., elect., 460 mf -10+100%, 20 vdc	CBR-46-064
C8	Not assigned	
C11*	Cap., mylar, 0.0022 mf ±10%, 200 vdc	CGK-22-008
C13	Not assigned	
C14	Same as C4	
C15*	Cap., tant., 2.5 mf -15+75%, 100 vdc	CBN-25-010
C16, CR2 thru CR6	Not assigned	
CR7	Rectifier	FBL-00-054
CR8, CR9	Rectifier	FBL-00-030
CR14 thru CR16	Same as CR7	

UNIQUE PARTS (Cont.)

MODEL LCS-C-01 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
CR18 thru CR20	Not assigned	
F1	Fuse, 15A, 8 AG, NORM-BLO	FFR-15-000
Q1,* Q2*	Transistor, NPN	FBN-L113
Q3,* Q4*	Transistor, NPN	FBN-L169
Q5	Not assigned	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 1,000 ohms ±10%, 1 w	DGB-1021
R4	Res., ww, 220 ohms ±3%, 5 w	DFR-22-079
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., film, 249 ohms ±1%, ¼ w	DCR-25-034
R7	Res., ww, 0.3 ohm ±5%, 3 w	DFM-30-053
R8	Res., var., ww or cermet, 10,000 ohms ±10%, ¾ w	DNT-10-045
R11	Same as R7	
R13	Res., var., ww, 100 ohms ±10%, 1½ w	DNR-10-146
R17 thru R21, R23	Not assigned	
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39	Res., comp., 100,000 ohms ±10%, ¼ w	DCB-1041
R40	Not assigned	
R41,* R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-155-020
T1	Transformer	ABA-LCSC-01

* On units with serial no. prefixes A - D: C11 is 0.0068 mf, CGK-68-001: C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36485; R2 is 220 ohms, DCB-2211; R5 is 1,200 ohms ±10%, DCB-1221; R26, R41, R42, R44, R45, R46 are not used. Q1 is only used on these units.

MODEL LCS-C-02

C3	Not assigned	
C4	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C5	Not assigned	
C6	Cap., elect., 2,700 mf -10+100%, 50 vdc	CBS-27-089

UNIQUE PARTS (Cont.)

MODEL LCS-C-02 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
C7	Cap., elect., 220 mf -10+100%, 40 vdc	CBR-22-065
C8	Not assigned	
C11*	Cap., mylar, 0.0022 mf ±10%, 200 vdc	CGK-22-008
C13	Not assigned	
C14	Same as C4	
C15*	Cap., tant., 2.5 mf -15+75%, 100 vdc	CBN-25-010
C16, CR2 thru CR6	Not assigned	
CR7	Rectifier	FBL-00-054
CR8, CR9	Rectifier	FBL-00-030
CR14 thru CR16	Same as CR7	
CR18, CR19	Same as CR8	
CR20	Not assigned	
F1	Fuse, 5 A, 8 AG, NORM-BLO	FFR-05-000
Q1,* Q2*	Transistor, NPN	FBN-L109
Q3,* Q4*	Transistor, NPN	FBN-L170
Q5	Same as Q1	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 3,300 ohms ±5%, 1 w	DGB-3325
R4	Not assigned	
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., film, 249 ohms ±1%, ¼ w	DCR-25-034
R7	Res., ww, 0.66 ohm ±5%, 3 w	DFM-66-059
R8	Res., var., ww or cermet, 23,000 ohms ±10%, ¾ w	DNT-23-072
R11	Same as R7	
R13	Res., var., ww, 100 ohms ±10%, 1½ w	DNR-10-046
R17	Same as R3	
R18	Res., comp., 820 ohms ±10%, ¼ w	DCB-8211
R19	Res., comp., 220 ohms ±10%, ¼ w	DCB-2211
R20, R21, R23	Not assigned	
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39	Res., comp., 100,000 ohms ±10%, ¼ w	DCB-1041
R40	Not assigned	
R41*, R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611

UNIQUE PARTS (Cont.)

MODEL LCS-C-02 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
S1	Thermostat	FKA-148-030
T1	Transformer	ABA-LCSC-02

* On units with serial no. prefixes A - D: C11 is 0.0068 mf, CGK-68-001; C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2 is 330 ohms, DCB-3311; R5 is 1,200 ohms ±10%, DCB-1221; R26, R41, R42, R44, R45, R46 are not used. Q1 is only used on these units.

MODEL LCS-C-03

C3	Not assigned	
C4	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C5	Not assigned	
C6	Cap., elect., 1,100 mf -10+100%, 75 vdc	CBS-11-090
C7	Cap., elect., 170 mf -10+75%, 50 vdc	CBR-17-066
C8	Not assigned	
C11	Cap., elect., 220 mf -10+100%, 40 vdc	CBR-22-065
C13*	Cap., mylar, 0.068 mf ±10%, 200 vdc	CGL-68-003
C14	Same as C4	
C15*	Cap., tant., 2.5 mf -15+75%, 100 vdc	CBN-25-010
C16, CR2 thru CR6	Not assigned	
CR7	Rectifier	FBL-00-054
CR8, CR9	Rectifier	FBL-00-030
CR14 thru CR16	Same as CR7	
CR18, CR19	Same as CR8	
CR20	Not assigned	
F1	Fuse, 5A, 8 AG, NORM-BLO	FFR-05-000
Q1,* Q2*	Transistor, NPN	FBN-L109
Q3,* Q4*	Transistor, NPN	FBN-L170
Q5	Same as Q1	
Q7*	Same as Q3	
R2*	Res., comp., 120 ohms ±10%, ¼ w	DCB-1211
R3	Res., comp., 10,000 ohms ±10%, 1 w	DGB-1031
R4	Not assigned	
R5*	Res., comp., 6,800 ohms ±5%, ¼ w	DCB-6825
R6	Res., film, 249 ohms ±1%, ¼ w	DCR-25-034
R7	Res., ww, 0.88 ohm ±2%, 3 w	DFM-88-063
R8	Res., var., cermet, 40,000 ohms ±10%, 0.75 w	DRT-40-009
R11	Same as R7	

UNIQUE PARTS (Cont.)

MODEL LCS-C-03 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R13	Res., var., ww, 100 ohms ±10%, 1½ w	DNR-10-046
R17	Same as R3	
R18	Res., comp., 820 ohms ±10%, ¼ w	DCB-8211
R19	Res., comp., 220 ohms ±10%, ¼ w	DCB-2211
R20, R21	Not assigned	
R23	Res., comp., 100,000 ohms ±10%, ¼ w	DCB-1041
R26*	Res., comp., 27 ohms ±10%, ¼ w	DCB-2701
R37	Same as R7	
R39	Res., comp., 220,000 ohms ±10%, ¼ w	DCB-2241
R40	Not assigned	
R41,* R42*	Same as R26	
R44* thru R46*	Res., comp., 560 ohms ±10%, ¼ w	DCB-5611
S1	Thermostat	FKA-155-020
T1	Transformer	ABA-LCSC-03

* On units with serial no. prefixes A - D: C15 is Cap., mylar, 0.1 mf ±10%, 200 vdc, CAM-10-012; Q2, Q3, Q4, Q7 are FBN-36220; R2 is 330 ohms, DCB-3311; R5 is 1,200 ohms ±10%, DCB-1221; R26, R41, R42, R44, R45, R46 are not used. C13, Q1 are only used on these units.

MODEL LCS-C-04

C3, C4	Not assigned	
C5	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C6	Cap., elect., 400 mf -10+100%, 100 vdc	CBR-40-044
C7	Cap., elect., 60 mf -10+100%, 100 vdc	CBP-60-051
C8	Not assigned	
C11	Cap., mylar, 0.0068 mf ±10%, 200 vdc	CGK-68-001
C13, C14	Not assigned	
C15	Cap., mylar, 0.1 mf ±10%, 200 vdc	CAM-10-012
C16	Not assigned	
CR2 thru CR5	Rectifier	FBL-00-054
CR6	Not assigned	
CR7	Same as CR2	
CR8	Rectifier	FBL-00-036
CR9	Rectifier	FBL-00-030
CR14, CR15	Not assigned	
CR16	Same as CR2	
CR18, CR19	Same as CR9	

UNIQUE PARTS (Cont.)

MODEL LCS-C-04 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
CR20	Not assigned	
F1	Fuse, 5 A, 8 AG, NORM-BLO	FFR-05-000
Q1	Transistor, NPN	FBN-L108
Q2 thru Q4	Transistor, NPN	FBN-35902
Q5	Same as Q1	
Q7	Same as Q2	
R2	Res., comp., 220 ohms ±10%, ¼ w	DCB-2211
R3	Res., comp., 27,000 ohms ±10%, 1 w	DCB-2731
R4	Not assigned	
R5	Res., comp., 1,200 ohms ±10%, ¼ w	DCB-1221
R6	Res., film, 249 ohms ±1%, ¼ w	DCR-25-034
R7	Res., ww, 1.82 ohms ±2%, 3 w	DFN-18-067
R8	Res., var., cermet, 75,000 ohms ±10%, 0.75 w	DRT-75-010
R11	Same as R7	
R13	Res., var., ww, 100 ohms ±10%, 1½ w	DNR-10-046
R17	Same as R3	
R18	Res., comp., 820 ohms ±10%, ¼ w	DCB-8211
R19	Same as R2	
R20, R21	Not assigned	
R23	Res., comp., 100,000 ohms ±10%, ¼ w	DCB-1041
R26	Not assigned	
R37	Same as R7	
R39	Not assigned (printed circuit board "A")	
R39A	Not assigned (terminal board "E")	
R40, R41	Not assigned	
S1	Thermostat	FKA-155-020
T1	Transformer	ABA-LCSC-48

MODEL LCS-C-05

C3, C4	Not assigned	
C5	Cap., mylar, 0.033 mf ±10%, 400 vdc	CGL-33-009
C6	Cap., elect., 240 mf -10+100%, 200 vdc	CBR-24-033
C7	Cap., elect., 30 mf -10+100%, 250 vdc	CBP-30-017
C8	Not assigned	
C11	Cap., mylar, 0.0022 mf ±10%, 200 vdc	CGK-22-008
C13, C14	Not assigned	
C16	Not assigned	
CR2 thru CR6	Rectifier	FBL-00-033
CR7	Not assigned	
CR8	Same as CR2	
CR9	Rectifier	FBL-00-030

UNIQUE PARTS (Cont.)

MODEL LCS-C-05 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
CR14 thru CR16	Not assigned	
CR18, CR19	Same as CR9	
CR20	Same as CR2	
F1	Fuse, 1½ A, 8 AG, NORM-BLO	FFR-01-500
Q1	Transistor, NPN	FBN-L115
Q2	Transistor, NPN	FBN-L147
Q3, Q4	Transistor, NPN	FBN-38982
Q5	Same as Q1	
Q7	Same as Q3	
R2	Res., comp., 220 ohms ±10%, ¼ w	DCB-2211
R3	Res., comp., 100,000 ohms ±10%, 1 w	DGB-1041
R4	Not assigned	
R5	Res., comp., 1,200 ohms ±10%, ¼ w	DCB-1221
R6	Res., film, 249 ohms ±1%, ¼ w	DCR-25-034
R7	Res., ww, 4.36 ohms ±2%, 3 w	DFN-44-074
R8	Res., var., cermet, 150,000 ohms ±10%, 0.75 w	DRV-15-006
R11	Same as R7	
R13	Res., var., ww, 100 ohms ±10%, 1½ w	DNR-10-046
R17	Same as R3	
R18	Res., comp., 820 ohms ±10%, ¼ w	DCB-8211
R19	Same as R2	
R20, R21	Not assigned	
R23	Res., comp., 100,000 ohms ±10%, ¼ w	DCB-1041
R26	Not assigned	
R37	Same as R7	
R39	Not assigned (printed circuit board "A")	
R39A	Not assigned (terminal board "E")	
R40, R41	Not assigned	
S1	Thermostat	FKA-148-030
T1	Transformer	ABA-LCSC-100

PARTS FOR "V" OPTION

On all LCS-C models with suffix "V" capacitor C10 and transformer T1 change. Part no. change for C10 is listed here. For transformer T1 used on these models, see standard LCS-C model parts list for the standard transformer part no. and add suffix "G"* to the part no.

* Suffix "V" for serial no prefixes A & B.

ALL MODELS

C10	Cap., paper, 0.01 mf ±10%, 1000 vdc	CAL-10-021

PARTS FOR OVERVOLTAGE PROTECTOR ACCESSORY MODELS LMOV-1, LMOV-2, LMOV-3, LHOV-4, LHOV-5, LHOV-6

COMMON PARTS

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
C1	Cap., mylar, 0.01 mf ±20%, 80 vdc	CGL-10-008
Q1	Transistor, NPN	FBN-L102
R3	Res., film, 200 ohms ±5%, ½ w	DCR-20-010
R4	Res., thermistor, 425 ohms ±5%, 1¼ w	DKR-43-004
R5, R6	Res., comp., 1,200 ohms ±10%, ½ w	DEB-1221
R8	Res., comp., 15,000 ohms ±10%, ½ w	DEB-1531
R10	Same as R5	
SCR1	Rectifier, silicon controlled	FBP-00-009

UNIQUE PARTS

MODEL LMOV-1

Q2	Transistor, PNP	FBN-L103
R1	Res., var., ww or cermet, 2,000 ohms ±10%, ¾ w	DNS-20-034
R2	Res., film, 560 ohms ±2%, ½ w	DCR-56-002
R7	Res., comp., 33 ohms ±5%, ¼ w	DCB-3305
R9	Not assigned	

MODEL LMOV-2

Q2	Transistor, PNP	FBN-L103
R1	Res., var., ww or cermet, 5,000 ohms ±10%, ¾ w	DNS-50-036
R2	Res., film, 1,470 ohms ±1%, ½ w	DCS-15-031
R7	Res., comp., 33 ohms ±5%, ¼ w	DCB-3305
R9	Not assigned	

MODEL LMOV-3

Q2	Transistor, PNP	FBN-L114
R1	Res., var., ww or cermet, 20,000 ohms ±10%, ¾ w	DNT-20-010
R2	Res., film, 4,700 ohms ±2%, ½ w	DCS-47-028
R7	Res., comp., 39 ohms ±5%, ¼ w	DCB-3905
R9	Res., comp., 22 ohms ±10%, ½ w	DEB-2201

MODEL LHOV-4

Q2	Transistor, PNP	FBN-L114
R1	Res., var., ww or cermet, 10,000 ohms ±10%, ¾ w	DNT-10-045
R2	Res., film, 560 ohms ±2%, ½ w	DCR-56-002
R7	Res., comp., 33 ohms ±5%, ¼ w	DCB-3305
R9	Res., comp., 22 ohms ±10%, ½ w	DEB-2201

PARTS FOR OVERVOLTAGE PROTECTOR ACCESSORY MODELS LMOV-1, LMOV-2, LMOV-3, LHOV-4, LHOV-5, LHOV-6 (Cont.)

UNIQUE PARTS (Cont.)

MODEL LHOV-5

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
Q2	Transistor, PNP	FBN-L114
R1	Res., var., ww or cermet, 20,000 ohms ±10%, ¾ w	DNT-20-010
R2	Res., film, 560 ohms ±2%, ½ w	DCR-56-002
R7	Res., comp., 33 ohms ±5%, ¼ w	DCB-3305
R9	Res., comp., 22 ohms ±10%, ½ w	DEB-2201

MODEL LHOV-6

Q2	Transistor, PNP	FBN-L114
R1	Res., var., ww, 30,000 ohms ±10%, 0.6 w	DNT-30-027
R2	Res., film, 560 ohms ±2%, ½ w	DCR-56-002
R7	Res., comp., 33 ohms ±5%, ¼ w	DCB-3305
R9	Res., comp., 22 ohms ±10%, ½ w	DEB-2201

PARTS FOR METERED AND NON-METERED PANEL ACCESSORIES MODELS MP3, MP5, P3, P5

C1, C2	Cap., tant., 2.5 mf -10+75%, 100 vdc (ALL)	CBN-25-010
DS1	Pilot light assembly (ALL)	HRD-00-007
F1	Fuse, 5A, 3AG, SLO-BLO (ALL)	FFC-05-000
M1*	Voltmeter, 0-5 vdc (LCS-C-2)	EBN-50-003
M1*	Voltmeter, 0-8 vdc (LCS-C-5-OV, LCS-C-6, LCS-C-01)	EBN-80-005
M1*	Voltmeter, 0-15 vdc (LCS-C-12)	EBP-15-017
M1*	Voltmeter, 0-20 vdc (LCS-C-15, LCS-C-02)	EBP-20-014
M1*	Voltmeter, 0-25 vdc (LCS-C-20)	EBP-25-018
M1*	Voltmeter, 0-40 vdc (LCS-C-24—LCS-C-36, LCS-C-03)	EBP-40-013
M1*	Voltmeter, 0-60 vdc (LCS-C-48)	EBP-60-015
M1*	Voltmeter, 0-120 vdc (LCS-C-100)	EBR-12-075
M1*	Voltmeter, 0-150 vdc (LCS-C-120)	EBR-15-076
M1*	Voltmeter, 0-200 vdc (LCS-C-150)	EBR-20-077
M2*	Ammeter, 0-15 adc (LCS-C-2—LCS-C-12)	EDP-15-014
M2*	Ammeter, 0-10 adc (LCS-C-15, LCS-C-20, LCS-C-01)	EDP-10-013
M2*	Ammeter, 0-6 adc (LCS-C-24, LCS-C-28)	EDN-60-018

PARTS FOR METERED AND NON-METERED PANEL ACCESSORIES (Cont.)

MODELS MP-3, MP-5, P-3, P-5 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
M2*	Ammeter, 0-5 adc (LCS-C-36, LCS-C-02)	EDN-50-021
M2*	Ammeter, 0-3 adc (LCS-C-48)	EDN-30-019
M2*	Ammeter, 0-2 adc (LCS-C-03)	EDN-20-022
M2*	Ammeter, 0-1 adc (LCS-C-100—LCS-C-150)	EDN-10-014
R1	Res., var., ww, 2,200 ohms ±5%, 2 w (LCS-C-2)	DNS-22-053
R1	Res., var., ww, 4,500 ohms ±5%, 2w (LCS-C-5-OV, LCS-C-6)	DNS-45-059
R1	Res., var., ww, 9,000 ohms ±5%, 2 w (LCS-C-12, LCS-C-15, LCS-C-01)	DNS-90-051
R1	Res., var., ww, 23,000 ohms ±10%, 2 w (LCS-C-02)	DNT-23-069
R1	Res., var., cermet, 27,000 ohms ±10%, 2 w (LCS-C-20—LCS-C-48)	DRT-27-001
R1	Res., var., cermet, 40,000 ohms ±10%, 2 w (LCS-C-03)	DRT-40-040

PARTS FOR METERED AND NON-METERED PANEL ACCESSORIES (Cont.)

MODELS MP-3, MP-5, P-3, P-5 (Cont.)

CIRC. DESIG.	DESCRIPTION	LAMBDA NO.
R1	Res., var., cermet 75,000 ohms ±10%, 2 w (LCS-C-100—LCS-C-150)	DRT-75-041
S1**	Switch, SPST (ALL)	FDA-11-001
S1†	Switch, SPST (ALL)	FDA-11-040
XF1	Fuseholder (ALL)	HRK-00-007

* This part only used on MP-3, MP-5.
** This part only used on MP-3, P-3.
† This part only used on MP-5, P-5.

PARTS FOR METERED AND NON-METERED PANEL ACCESSORIES WITH "V" OPTION

On all metered and non-metered panels with "V" option, fuse F1 changes and a resistor is added in series with DS1. Part nos. for F1 and DS1-Res. are listed here.

F1	Fuse, 2.5 A, 3 AG, SLO-BLO	FFC-02-500
DS1-Res.	Res., comp., 120,000 ohms ±10%, ½ w	DEB-1241

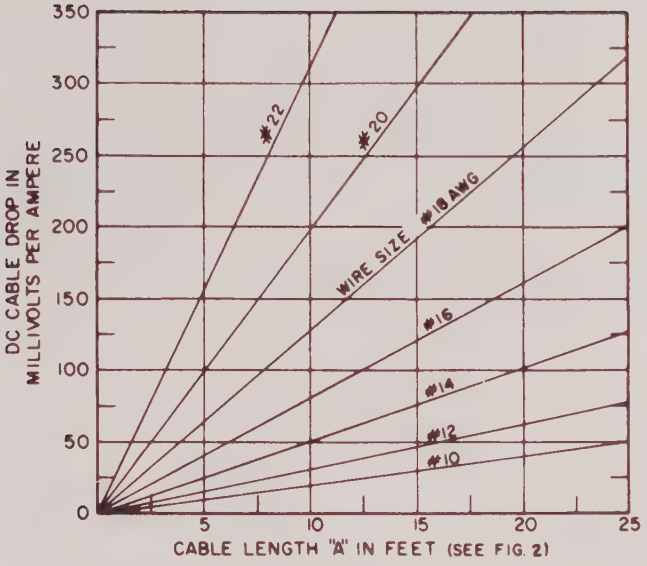

Figure 1. Cable Connection Chart

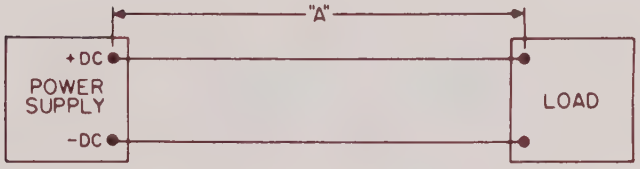

Figure 2. Cable Length "A" in Feet

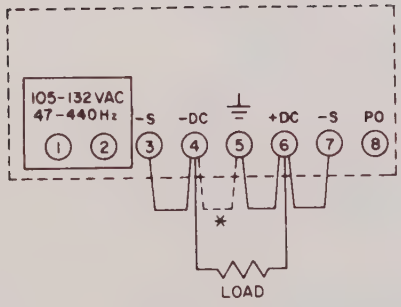

NOTE.
* FOR NEGATIVE GROUND, DISCONNECT JUMPER FROM TERMINALS 5 AND 6 AND RECONNECT TO TERMINALS 4 AND 5.

Figure 3. Two-Wire Connection

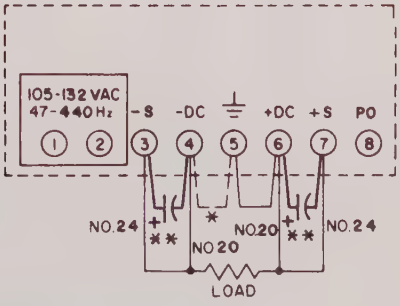

NOTE.
* FOR NEGATIVE GROUND, DISCONNECT JUMPER FROM TERMINALS 5 AND 6 AND RECONNECT TO TERMINALS 4 AND 5.
* * A 2.5 MF, ELECT., CAP. MAY BE REQUIRED.

Figure 4. Four-Wire Connection

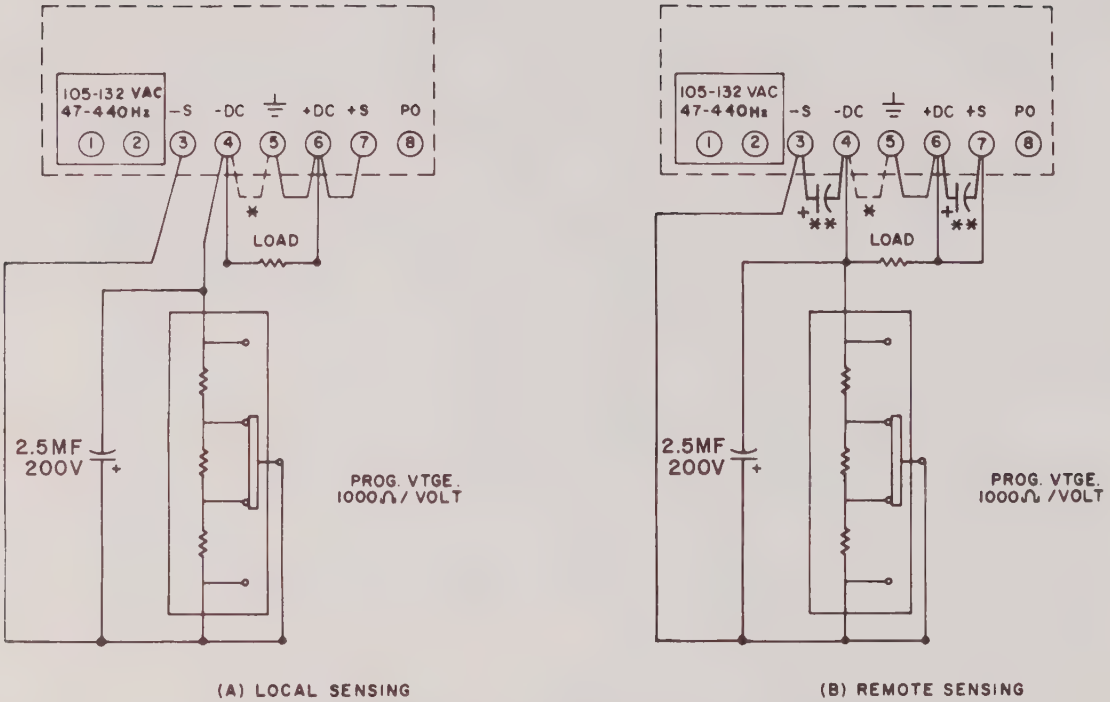

NOTE:
* FOR NEGATIVE GROUND, DISCONNECT JUMPER FROM TERMINALS 5 AND 6 AND RECONNECT TO TERMINALS 4 AND 5.
** A 2.5MF, ELECT., CAP. MAY BE REQUIRED.

Figure 5. Programmed Voltage, With External Resistor

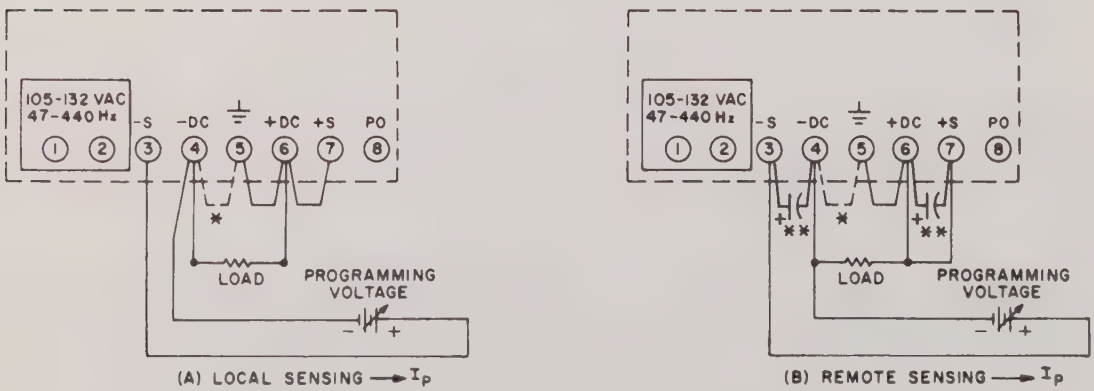

NOTE:
* FOR NEGATIVE GROUND, DISCONNECT JUMPER FROM TERMINALS 5 AND 6 AND RECONNECT TO TERMINALS 4 AND 5.
** A 2.5MF, ELECT., CAP. MAY BE REQUIRED.

Figure 6. Programmed Voltage, With External Programming Voltage Source

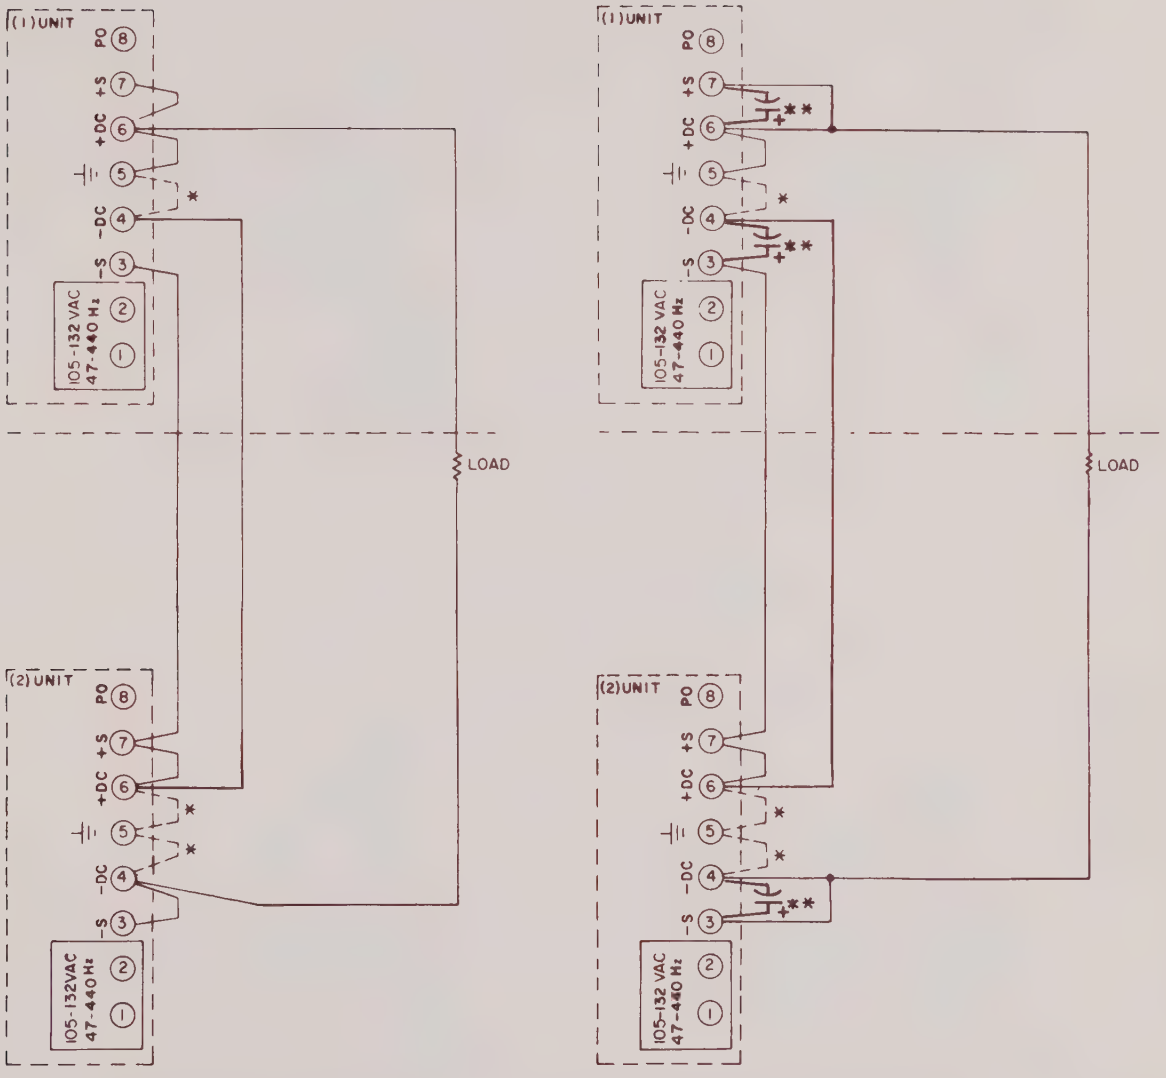

NOTE

* MAKE ONLY ONE GROUND CONNECTION FOR THE SERIES COMBINATION; TO CHANGE GROUND AS SHOWN, REMOVE JUMPER FROM TERMINALS 5 AND 6 ON (M) UNIT AND CONNECT ANY ONE OF THE OTHER JUMPERS AS SHOWN IN DOTTED LINE.

** A 2.5 MF, ELECT., CAP. MAY BE REQUIRED.

Figure 7. Series Connection, LCS-C-01 thru LCS-C-05 Only, Common Load

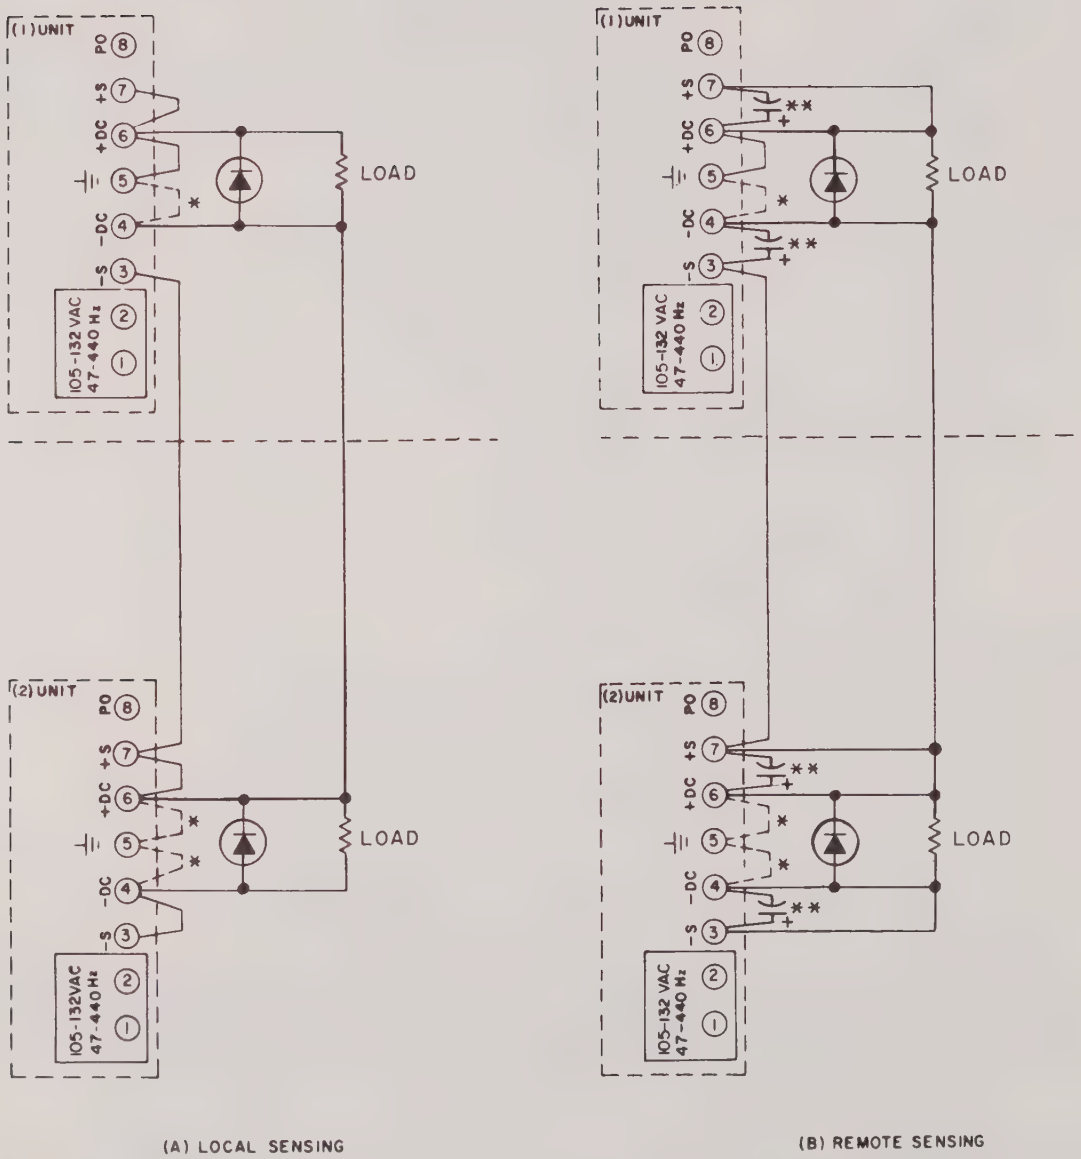

NOTE:

* MAKE ONLY ONE GROUND CONNECTION FOR THE SERIES COMBINATION; TO CHANGE GROUND AS SHOWN, REMOVE JUMPER FROM TERMINALS 5 AND 6 ON (M) UNIT AND CONNECT ANY ONE OF THE OTHER JUMPERS AS SHOWN IN DOTTED LINE.

** A 2.5 MF, ELECT., CAP. MAY BE REQUIRED.

Figure 7A. Series Connection (Diodes Not Required For LCS-C-01 thru LCS-C-05), Dual Load

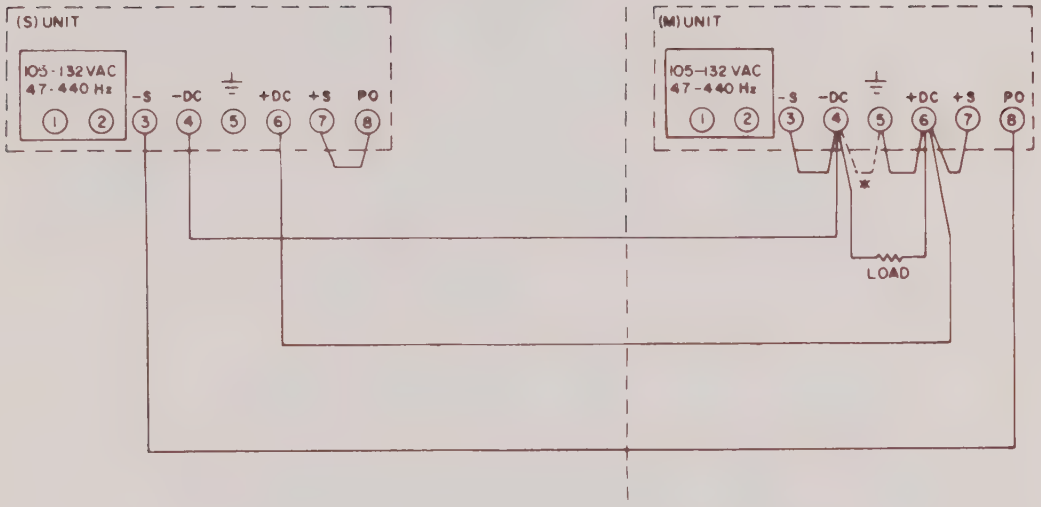

NOTE
* FOR NEGATIVE GROUND, DISCONNECT JUMPER FROM TERMINALS 5 AND 6 AND RECONNECT TO TERMINALS 4 AND 5

Figure 8. Parallel Connection, Local Sensing, LCS-C-01 — LCS-C-05 Only

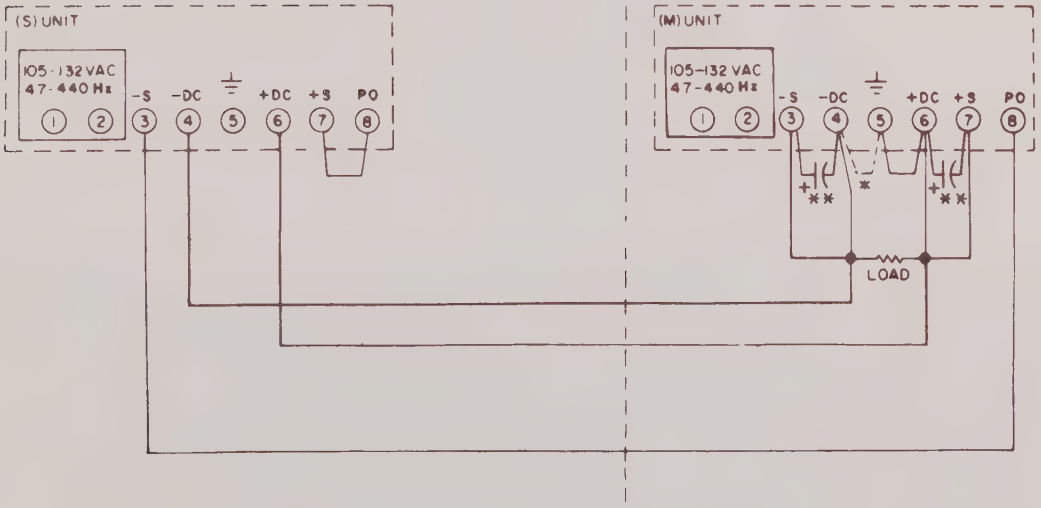

NOTE
* FOR NEGATIVE GROUND, DISCONNECT JUMPER FROM TERMINALS 5 AND 6 AND RECONNECT TO TERMINALS 4 AND 5
** A 2.5 MF, ELECT., CAP. MAY BE REQUIRED.

Figure 9. Parallel Connection, Remote Sensing, LCS-C-01 — LCS-C-05 Only

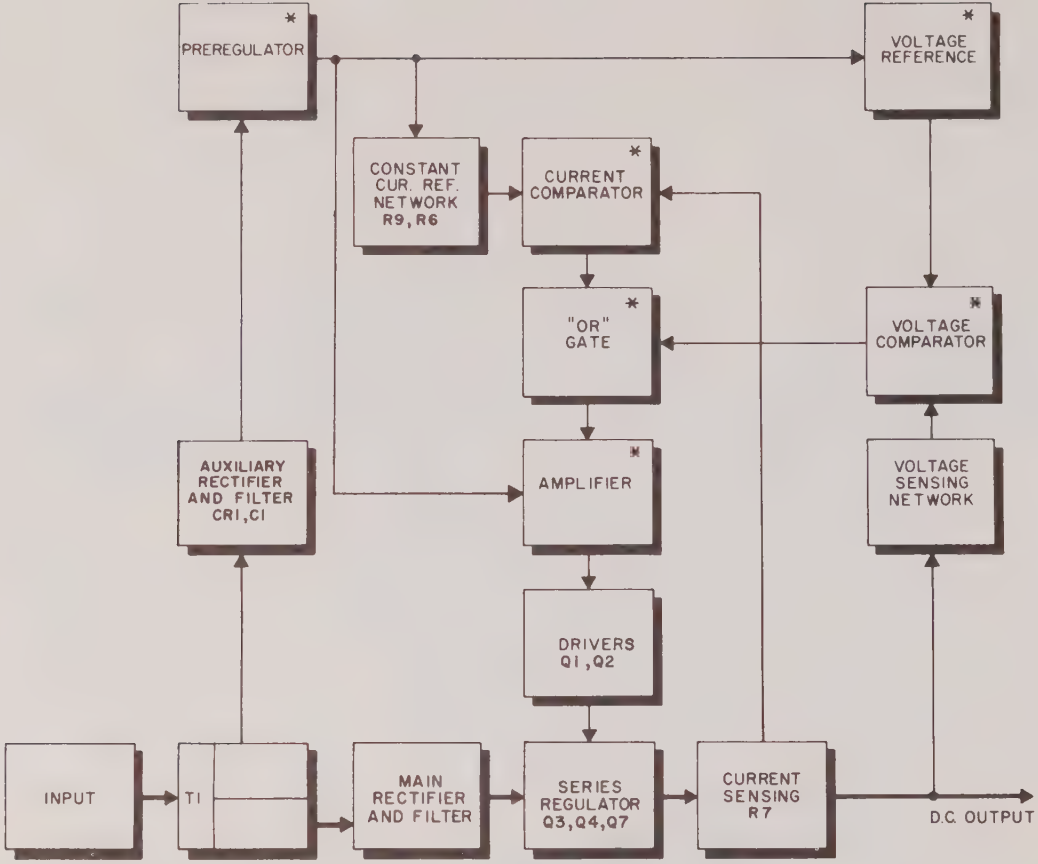

* THIS CIRCUIT ELEMENT IS LOCATED IN IC1.

Figure 10. Typical Block Diagram

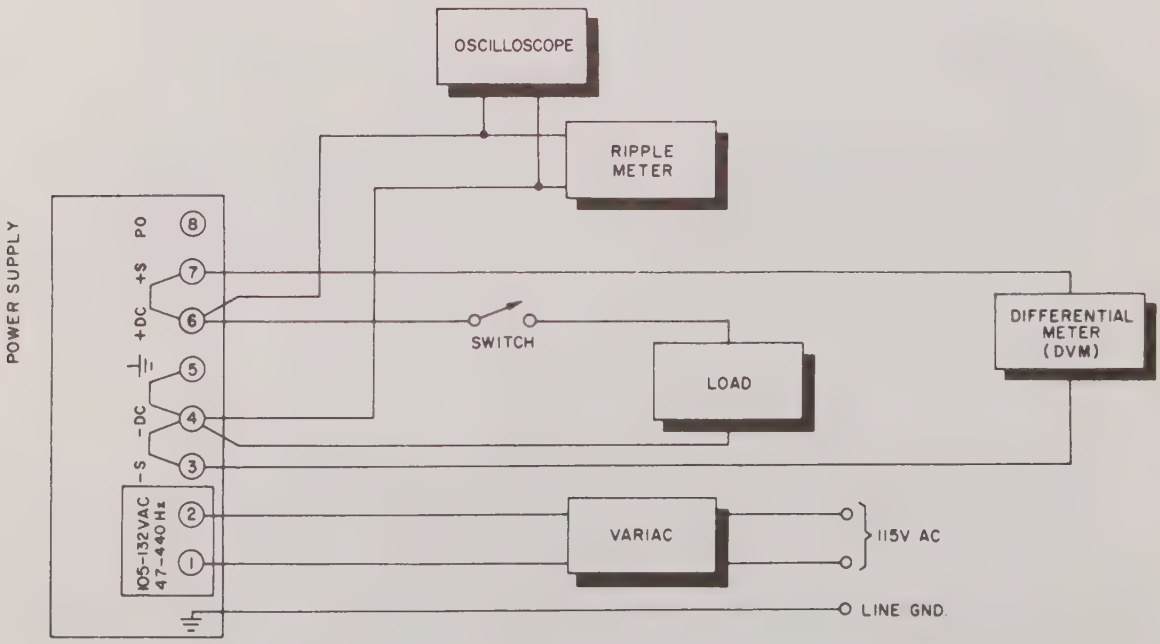

NOTES

1. REGULATION AND RIPPLE CHECK METERS MUST NOT BE GROUNDED THROUGH THREE-WIRE LINE CORD TO GROUND
2. PERFORM CHECKS WITH LOCAL SENSING CONNECTIONS ONLY.

Figure 11. Test Connections For Constant Voltage Performance Checks

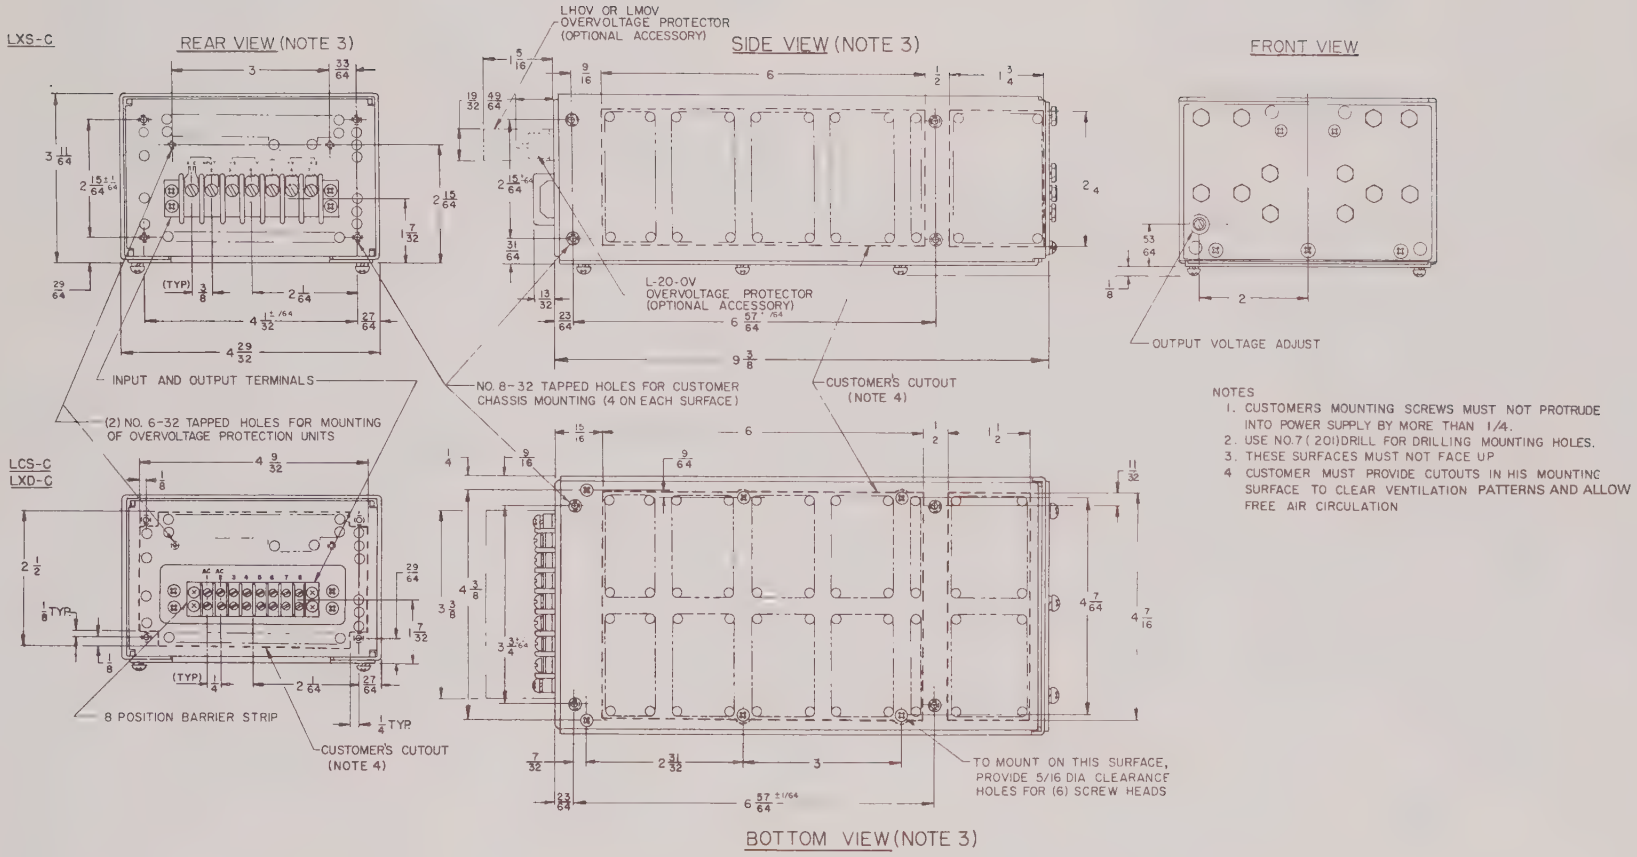
LXS-C
REAR VIEW (NOTE 3)
LHOV OR LMOV
OVERVOLTAGE PROTECTOR
(OPTIONAL ACCESSORY)
SIDE VIEW (NOTE 3)
FRONT VIEW
L-20-OV
OVERVOLTAGE PROTECTOR
(OPTIONAL ACCESSORY)
OUTPUT VOLTAGE ADJUST
INPUT AND OUTPUT TERMINALS
NO. 8-32 TAPPED HOLES FOR CUSTOMER
CHASSIS MOUNTING (4 ON EACH SURFACE)
CUSTOMER'S CUTOUT
(NOTE 4)
(2) NO. 6-32 TAPPED HOLES FOR MOUNTING
OF OVERVOLTAGE PROTECTION UNITS
LCS-C
LXD-C
8 POSITION BARRIER STRIP
CUSTOMER'S CUTOUT
(NOTE 4)
TO MOUNT ON THIS SURFACE,
PROVIDE 5/16 DIA CLEARANCE
HOLES FOR (6) SCREW HEADS
BOTTOM VIEW (NOTE 3)
NOTES
1. CUSTOMERS MOUNTING SCREWS MUST NOT PROTRUDE INTO POWER SUPPLY BY MORE THAN 1/4.
2. USE NO.7 (201)DRILL FOR DRILLING MOUNTING HOLES.
3. THESE SURFACES MUST NOT FACE UP
4 CUSTOMER MUST PROVIDE CUTOUTS IN HIS MOUNTING SURFACE TO CLEAR VENTILATION PATTERNS AND ALLOW FREE AIR CIRCULATION

Figure 12. Outline Drawing

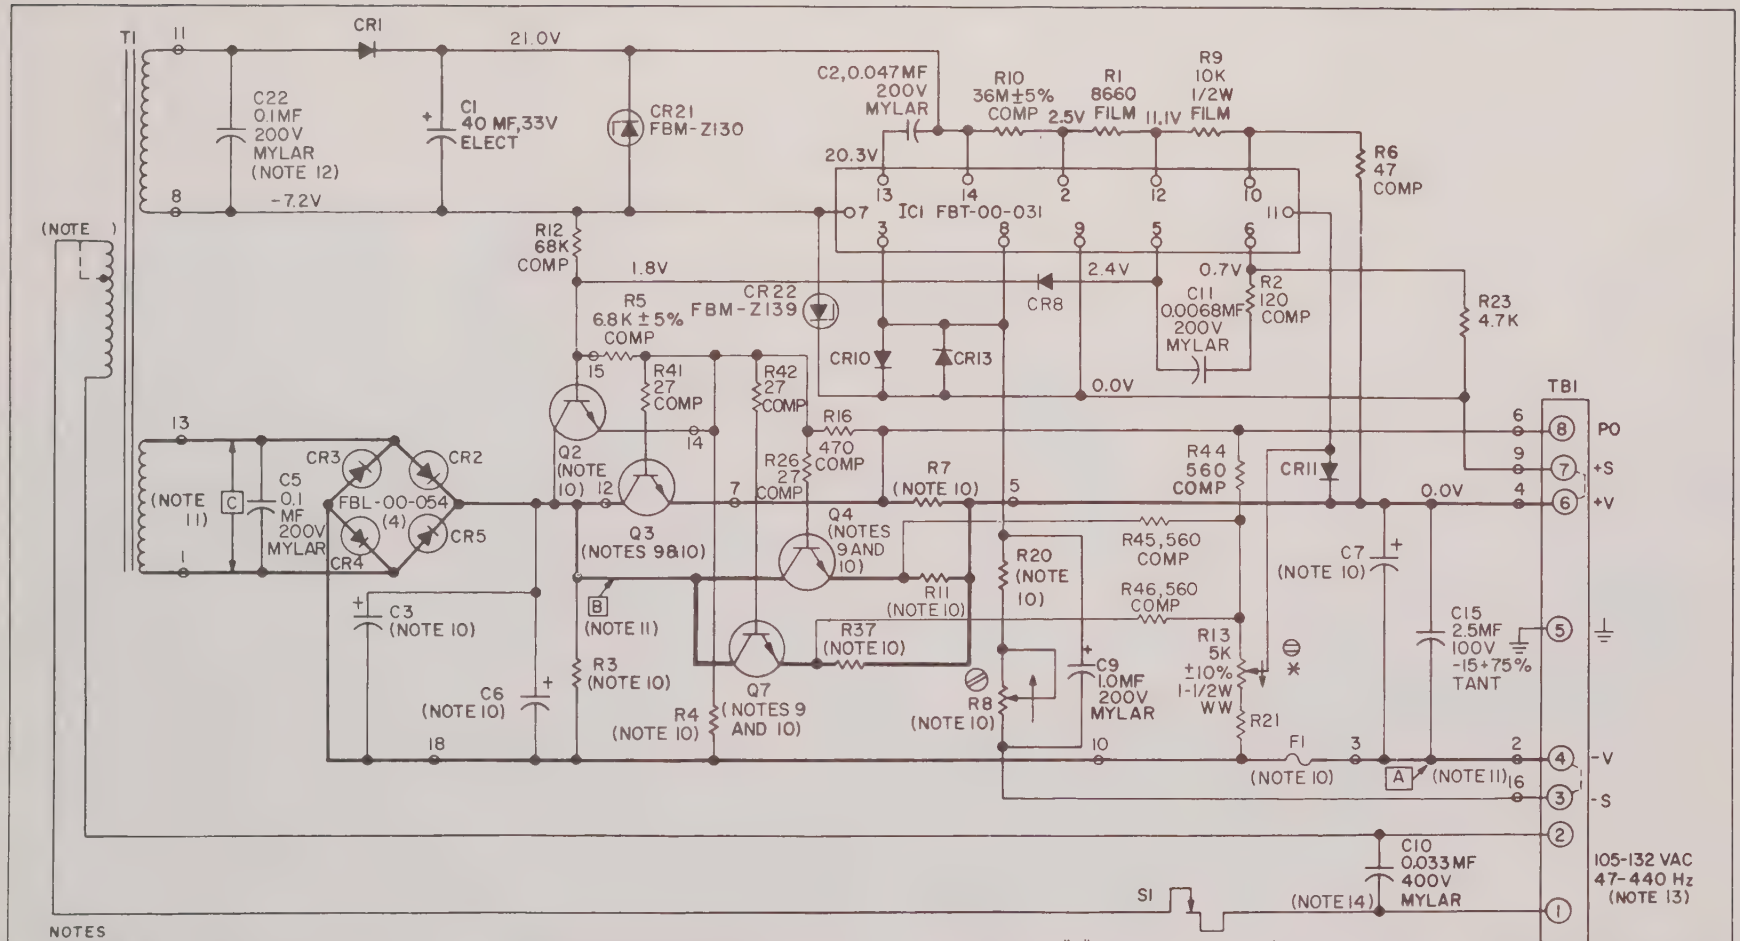

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%; WIREWOUND ±2% FILM ±1%; UNLESS OTHERWISE NOTED.
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%; MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT #FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47–57Hz, FOR 63–440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz, NOM. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. SEE TABLE I FOR COMPONENT VALUES
11. SEE TABLE I FOR VOLTAGE VALUES.
12. C22 ONLY USED ON MODELS LCS-C-12 AND LCS-C-15.
13. ON UNITS WITH "V" OPTION, T1 HAS TAPPED PRIMARY. "V" OPTION UNITS CAN BE WIRED FOR 187-242 V INPUT (USING TAP), OR FOR 205-265V INPUT (USING ENTIRE PRIMARY).
14. ON UNITS WITH "V" OPTION, C10 IS 0.01MF ±10%, 1000V, PAPER.

MODELS
LCS-C-12
LCS-C-15
LCS-C-20
LCS-C-24
LCS-C-28

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES E-G

LAMBDA ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

TABLE I
SCHEMATIC DATA REFERENCES
MODELS LCS-C-12 THRU LCS-C-28
FOR UNITS BEARING SERIAL NO. PREFIXES E-G

Models	Schematic Voltage Measurements			Schematic Components										
				C3,C6	C7	F1	Q2	Q3,Q4,Q7	R3	R4	R7,R11,R37	R8	R20	R21
	A (Vdc)	B (Vdc)	C (Vac)	-10+100% ELECT	-10+100% ELECT	(AMPS)	*FBN-	*FBN-	1W COMP	±10%, 1W COMP	WW	±10%, ¾W WW or CERMET	1/2W FILM	±1%, 1/4W FILM
LCS-C-12	-12	9.7	19.8	5100mf 30vdc	600mf 30vdc	15	L113	L169	5.6K ±5%	3.9K	0.21 ±5% 5W	10K	9.1K ±5%	100K
LCS-C-15	-15	10.1	22.5	5100mf 30vdc	600mf 30vdc	15	L113	L169	5.6K ±5%	3.9K	0.21 ±5% 5W	10K	9.1K ±5%	100K
LCS-C-20	-20	21.2	29.8	2700mf 50vdc	300mf 50vdc	15	L109	L170	10K ±10%	4.7K	0.39 ±5% 3W	20K	15K ±2%	100K
LCS-C-24	-24	21.6	32.9	2700 mf 50vdc	300mf 50vdc	10	L109	L170	10K ±10%	12K	0.39 ±5% 3W	20K	15K ±2%	100K
LCS-C-28	-28	26.0	38.9	1600mf 60vdc	300mf 50vdc	10	L109	L170	10K ±10%	12K	0.50 ±5% 3W	20K	24K ±5%	120K

*Lambda part number

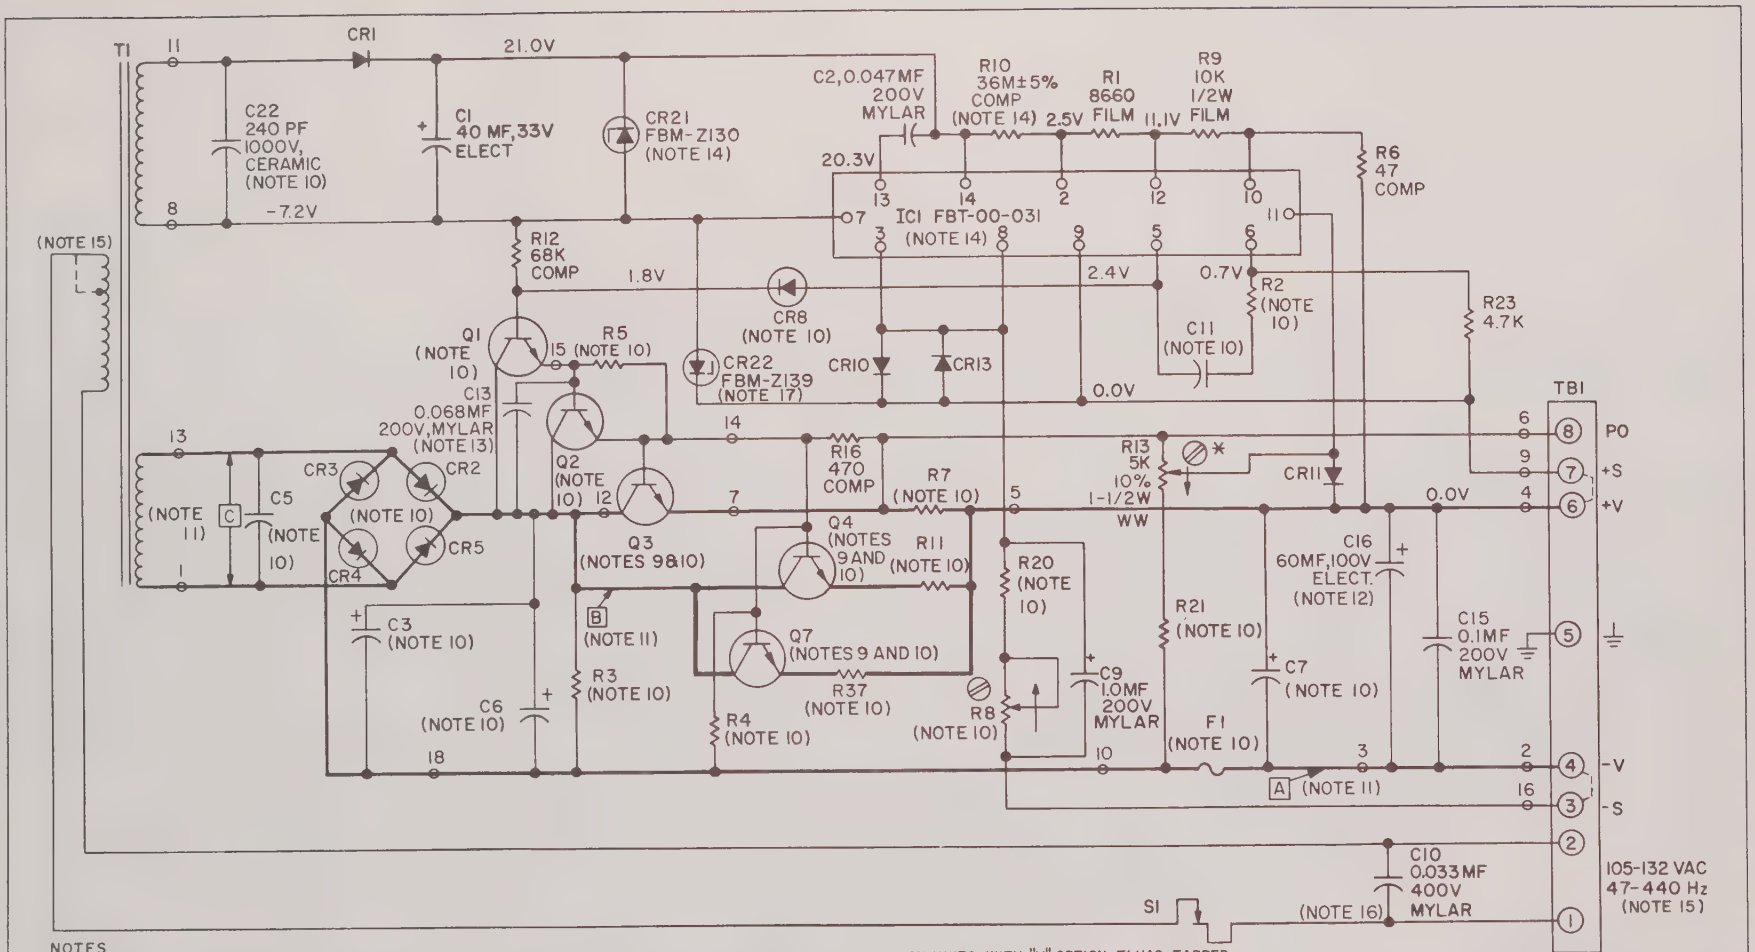

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT, RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES COMP. ±10%, WIREWOUND ±2% FILM ±1%; UNLESS OTHERWISE NOTED.
4. CAPACITOR TOLERANCES ELECTROLYTIC -10%, +100%; MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT.# FBL-00-030; USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz, NOM. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. SEE TABLE I FOR COMPONENT VALUES.
11. SEE TABLE I FOR VOLTAGE VALUES.
12. C16 ONLY USED ON MODEL LCS-C-48.
13. C13 NOT USED ON MODELS LCS-C-100 THRU LCS-C-150.
14. ON MODELS WITH SERIAL NO. PREFIX A1CI IS FBT-00-010, R10 IS 68M± 10% AND CR21 IS NOT USED.
15. ON UNITS WITH "V" OPTION, T1 HAS TAPPED PRIM. "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP), OR FOR 205-265V INPUT (USING ENTIRE PRIMARY). ON SERIAL NO. PREFIXES A&B, "V" OPTION UNITS; T1 PRIMARY IS NOT TAPPED. AC INPUT IS 205-265V.
16. ON UNITS WITH "V" OPTION, C10 IS 0.01MF±10%, 1000V, PAPER
17. CR22 NOT USED ON UNITS WITH SERIAL NO. PREFIXES A-C.
18. C22 ONLY USED ON MODEL LCS-C-150.

MODELS
LCS-C-36
LCS-C-48
LCS-C-100
LCS-C-120
LCS-C-150

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES A-G

LAMBDA
ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

TABLE 1
SCHEMATIC DATA REFERENCES
MODELS LCS-C-36 THRU LCS-C-150

MODELS	Schematic Voltage Measurements			Schematic Components																
	A (Vdc)	B (Vdc)	C (Vac)	C3,C6	C5	C7	C11	CR2-CR5	CR8	F1	Q1	Q2	Q3,Q4,Q7	R2	R3	R4	R5	R7,R11,R37	R8	R20	R21
				-10+100% ELECT	±10% MYLAR	-10+100% ELECT	±10%,200V MYLAR	*FBL-00-	*FBL-00-	(AMPS)	*FBN-	*FBN-	*FBN-	±10%, 1/4W COMP	±10%, 1W COMP		±10%, 1/4W COMP	3W, WW	±10% 3/4W	1/2W FILM	±1% FILM
LCS-C-36	-36	32.3	49.0	1100mf 75vdc (C3 not used)	0.1mf 200vdc	160mf 60vdc	0.0068mf	054	030	10	L109	36487	36487	330	10K	12K, ±10% 1W, COMP	330	0.66 ±5%	23K WW or CERMET	24K ±5%	120K 1/4W
LCS-C-48	-48	45.7	66.9	400 mf 100vdc	0.1mf 200vdc	60mf 100vdc	0.022mf	054	036	5	L108	35902	35902	470	27K	13K, ±3% 5W, WW	330	0.80 ±2%	25K WW or CERMET	39K ±5%	200K 1/4K
LCS-C-100	-100	60.0	113	240mf 200 vdc (C3 not used)	0.033mf 400vdc	39mf 200vdc	0.0047mf	033	033	5	L115	L147	38982	100	100K	40K, ±5% 5W, WW	1.2K	2.3 ±2%	75K CERMET	91K ±5%	432K 1/2W
LCS-C-120	-120	61.0	129	240mf 200vdc (C3 not used)	0.033mf 400vdc	39mf 200vdc	0.0047mf	033	033	1-1/2	L115	L147	38982	100	100K	40K, ±5% 5W, WW	1.2K	2.7 ±2%	75K CERMET	91K ±5%	432K 1/2W
LCS-C-150	-150	75.0	160	200mf 250vdc (C3 not used)	0.033mf 400vdc	30mf 250vdc	0.0022mf	033	033	1-1/2	L115	L147	38982	220	100K	40K, ±5% 5W, WW	1.2K	3.5 ±2%	75K CERMET	120K ±1%	432K 1/2W

*Lambda part number.

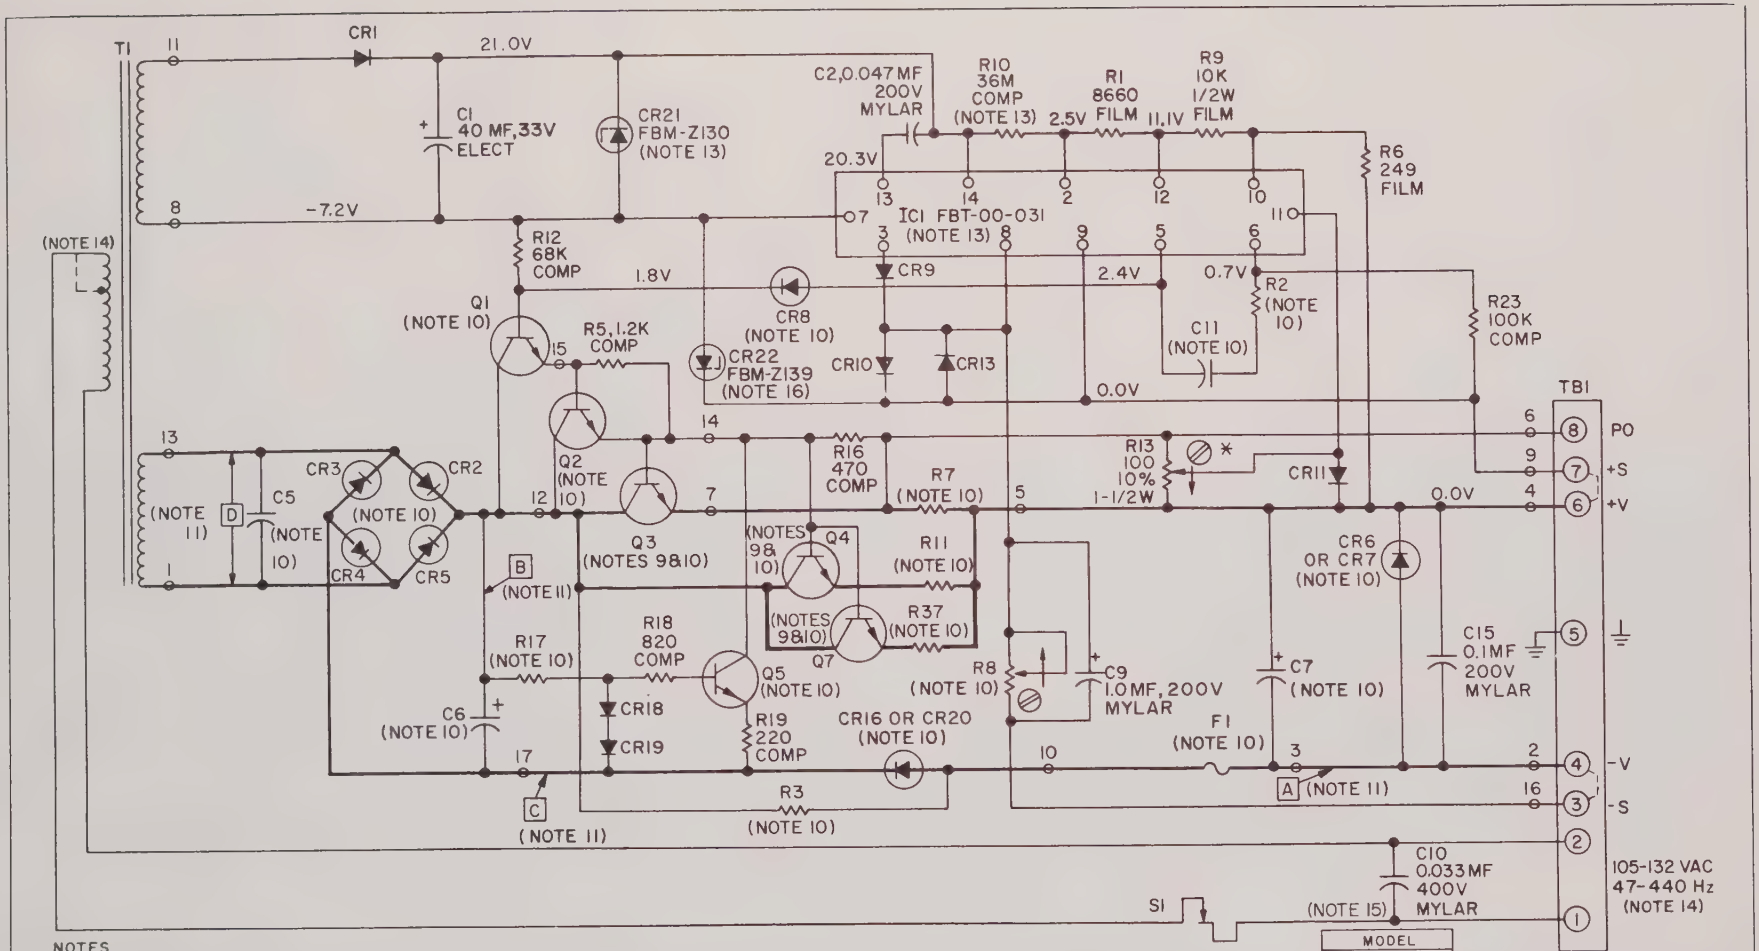

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT, RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%, WIREWOUND ±2% FILM ±1%; UNLESS OTHERWISE NOTED
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%, MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT #FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz, MAX. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. SEE TABLE I FOR COMPONENT VALUES.
11. SEE TABLE I FOR VOLTAGE VALUES.
12. NOT USED ON MODEL LCS-C-05.
13. ON MODELS WITH SERIAL NO. PREFIX A IC1 IS FBT-00-010, R10 IS 68M AND CR21 IS NOT USED
14. ON UNITS WITH "V" OPTION, T1 HAS TAPPED PRIM. "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP), OR FOR 205-265V INPUT (USING ENTIRE PRIMARY). ON SERIAL NO. PREFIXES A&B, "V" OPTION UNITS; T1 PRIMARY IS NOT TAPPED. AC INPUT IS 205-265V.
15. ON UNITS WITH "V" OPTION, C10 IS 0.01MF±10%, 1000V, PAPER.
16. CR22 NOT USED ON UNITS WITH SERIAL NO. PREFIXES A-C.

MODEL
LCS-C-04
LCS-C-05

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES A-G

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS.

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

A

LAMBDA

ELECTRONICS

MELVILLE, L.I., NEW YORK

DIVISION OF Veeco INSTRUMENTS INC.

TABLE I
SCHEMATIC DATA REFERENCES
MODELS LCS-C-04, LCS-C-05

Model	Schematic Voltage Measurements				Schematic Components														
					C5	C6	C7	C11	CR2-CR5	CR6,CR20	CR7,CR16	CR8	F1	Q1,Q5	Q2	Q3,Q4,Q7	R2	R3,R17	R7,R11,R37	R8
	A (Vdc)	B (Vdc)	C (Vdc)	D (Vac)	±10% MYLAR	-10 + 100% ELECT.	-10 + 100% ELECT.	200vdc MYLAR	*FBL-00-	*FBL-00-	*FBL-00-	*FBL-00-	(AMPS)	*FBN-	*FBN-	*FBN-	±10%, 1/4W COMP	±10%, 1W COMP	±2%,3W WW	±10% CERMET
LCS-C-04	-60	33.2	-60.6	67	0.1mf 200vdc	400mf 100vdc	60mf 100vdc	0.0068mf	054	Not used	054	036	5	L108	35902	35902	220	27K	1.82	75K
LCS-C-05	-120	38	-120.6	113	0.033mf 400vdc	240mf 200vdc	30mf 250vdc	0.0022mf	033	033	Not used	033	1-1/2	L115	L147	38982	220	100K	4.36	150K

*Lambda part number

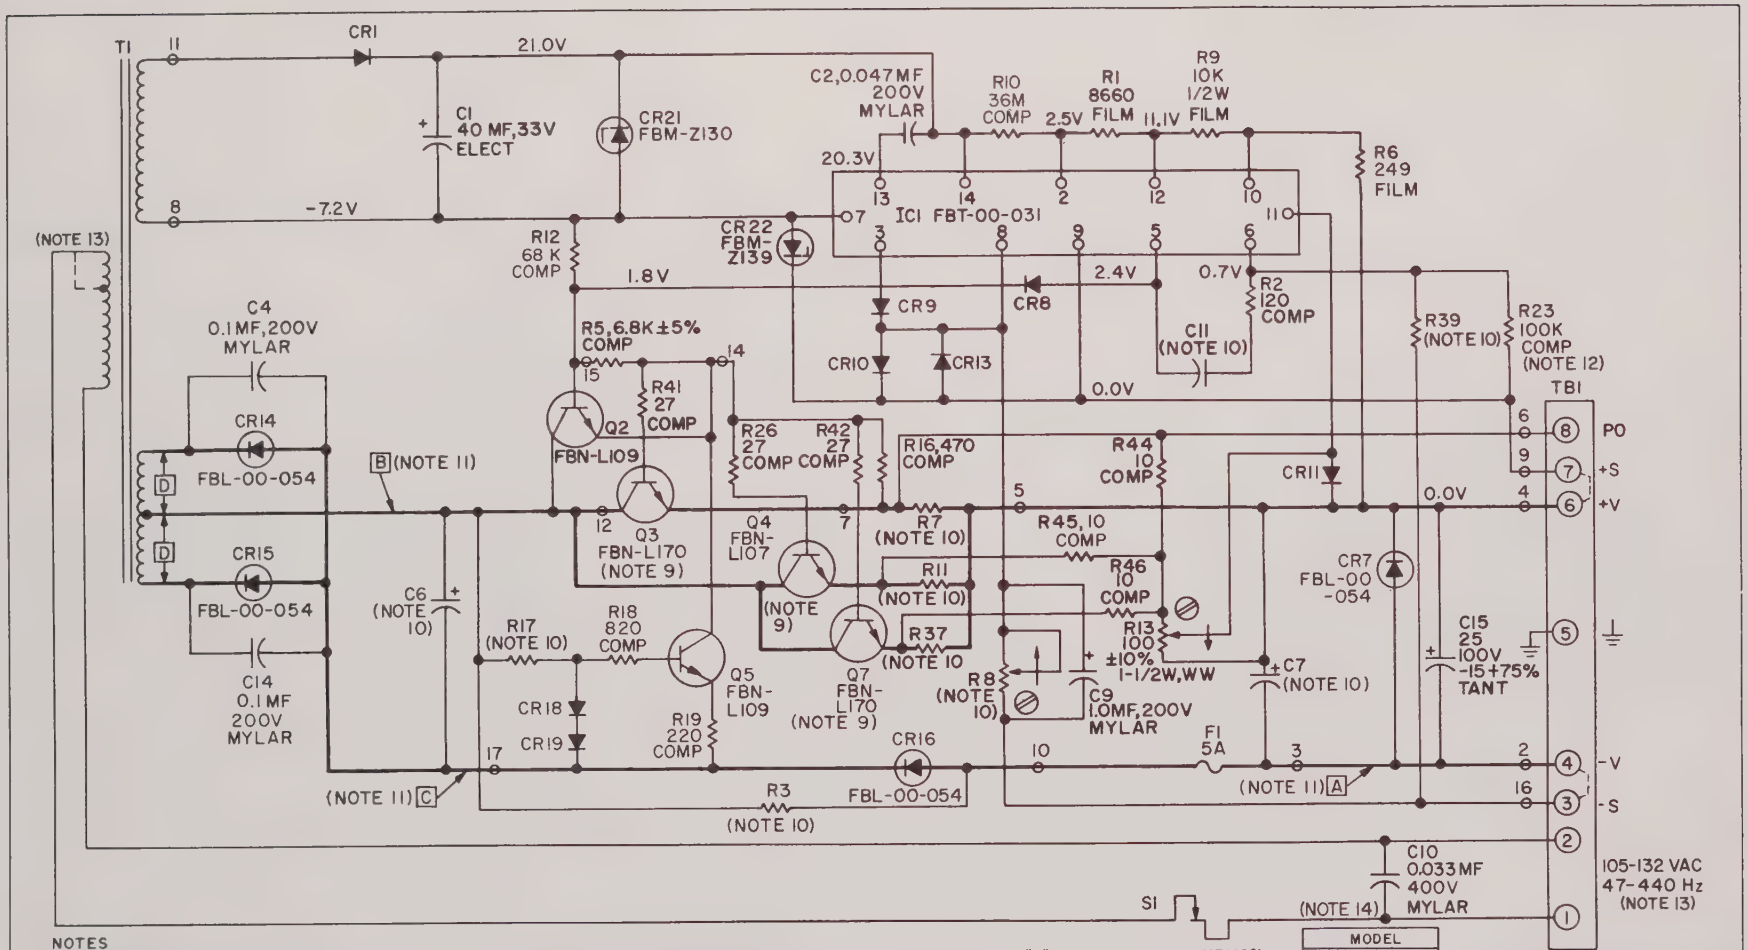

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%; WIREWOUND ±2% FILM ±1%; UNLESS OTHERWISE NOTED
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%; MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL. SEE INSTRUCTION MANUAL.
   - LAMBDA PT #FBL-00-030; USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED. INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz; MAX. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. SEE TABLE I FOR COMPONENT VALUES.
11. SEE TABLE I FOR VOLTAGE VALUES.
12. R23 ONLY USED ON MODEL LCS-C-03.
13. ON UNITS WITH "V" OPTION, T1 HAS TAPPED PRIM. "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP), OR FOR 205-265V INPUT (USING ENTIRE PRIMARY).
14. ON UNITS WITH "V" OPTION, C10 IS 0.01MF±10%, 1000V, PAPER

MODEL
LCS-C-02
LCS-C-03

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES E-G

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

LAMBDA
ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

TABLE I
SCHEMATIC DATA REFERENCES
MODELS LCS-C-02, LCS-C-03
FOR UNITS BEARING
SERIAL NO. PREFIXES E-G

Model	Schematic Voltage Measurements				Schematic Components						
					C6	C7	C11	R3, R17	R7, R11, R37	R8	R39
	A (Vdc)	B (Vdc)	C (Vdc)	D (Vac)	-10 + 100% ELECT	-10 + 100% ELECT	±10%, 200vdc MYLAR	1W COMP	3W WW	±10% 3/4W	±10%, 1/4w COMP
LCS-C-02	-18	17	-18.6	25.5	2700mf 50vdc	220mf 40vdc	0.0022mf	3.3K ±5%	0.66 ±5%	23K WW or CERMET	100K
LCS-C-03	-32	26	-32.6	41.9	1100mf 75vdc	170mf 50vdc	0.0068mf	10K ±10%	0.88 ±2%	40K CERMET	220K

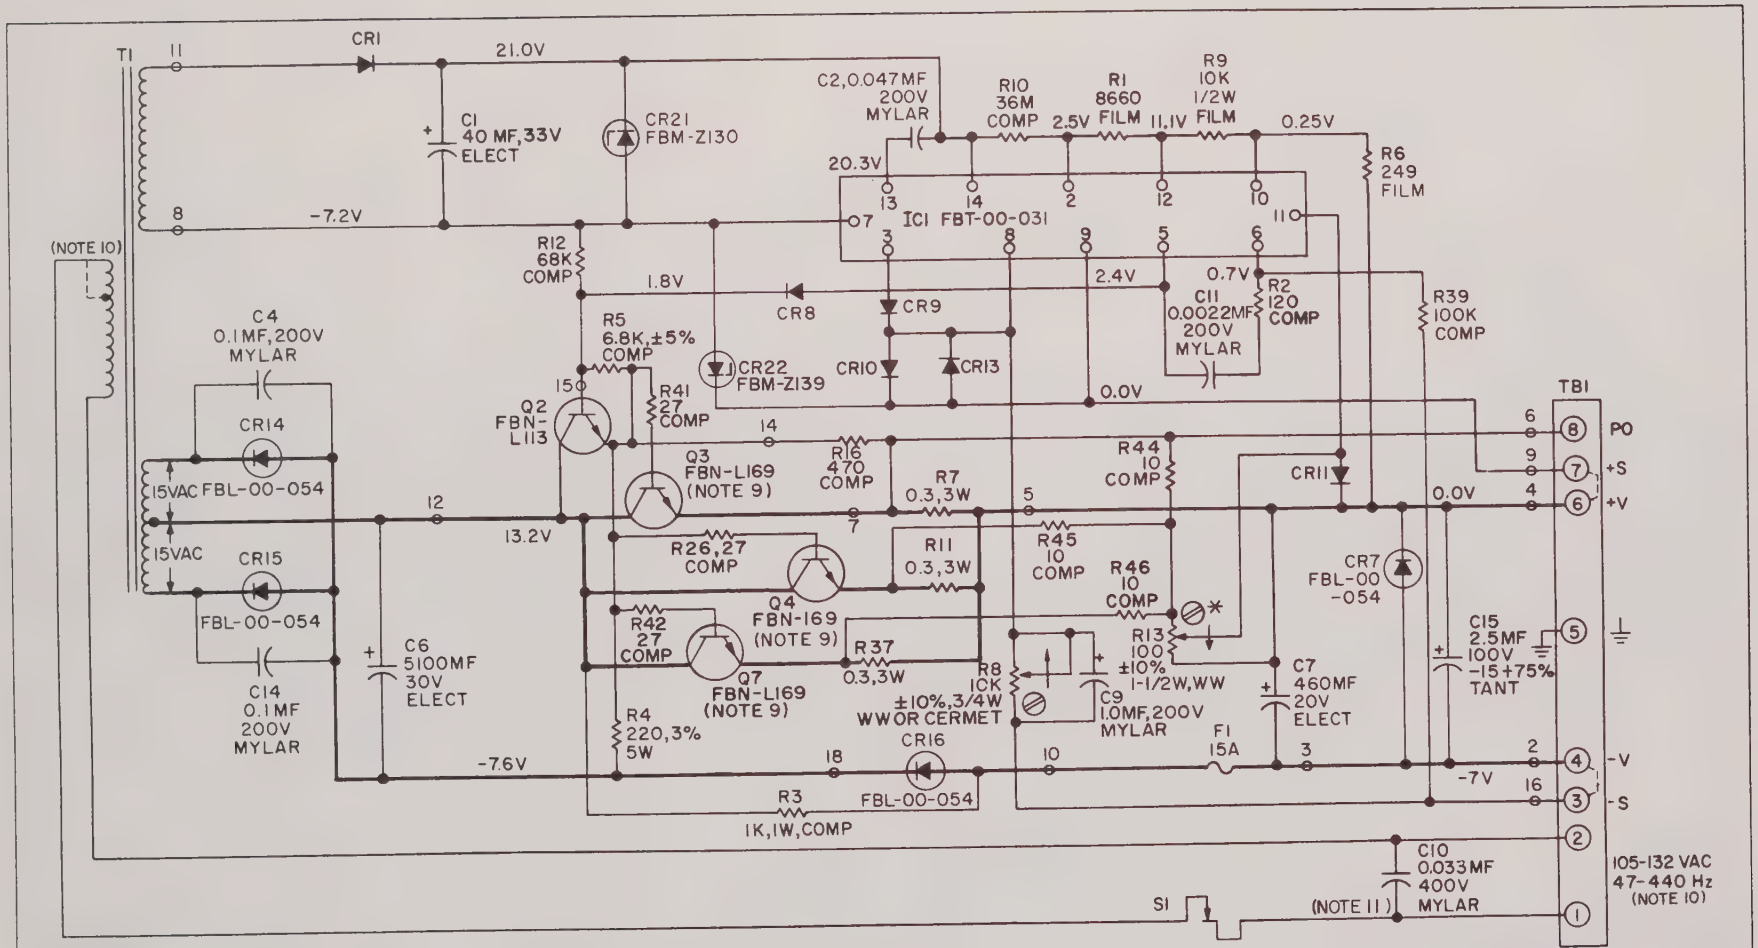

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%; WIREWOUND ±5% FILM ±1%; UNLESS OTHERWISE NOTED
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%, MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT #FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz; MAX. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. ON MODEL WITH "V" OPTION, T1 HAS TAPPED PRIM "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP), OR FOR 205-265V INPUT (USING ENTIRE PRIMARY).
11. ON UNITS WITH "V" OPTION, C10 IS 0.01MF ±10%, 1000V, PAPER.

MODEL
LCS-C-01

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES E-G

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

LAMBDA
ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

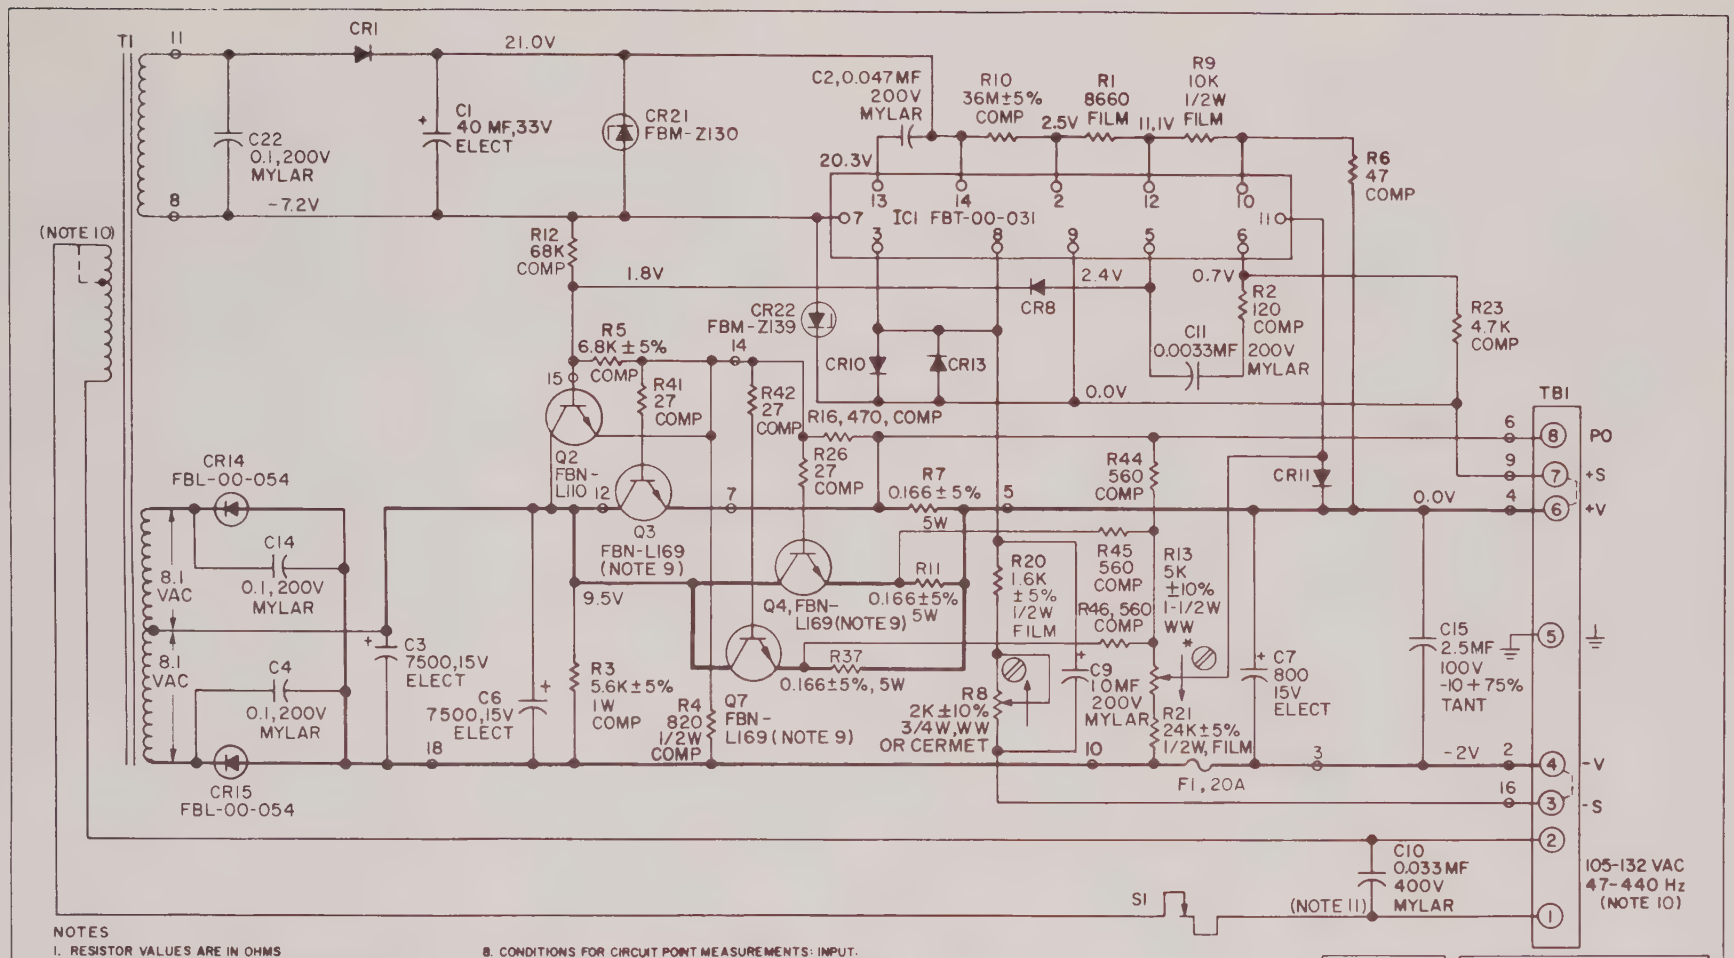

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT, RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%; WIREWOUND ±2% FILM ±1%; UNLESS OTHERWISE NOTED
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%, MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS:
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT #FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT. 115 VAC, 60Hz, NOM. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED.
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. ON UNITS WITH "V" OPTION T1 HAS TAPPED PRIMARY. "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP) OR FOR 205-265V INPUT (USING ENTIRE PRIMARY).
11. ON UNITS WITH "V" OPTION, C10 IS 0.01MF ± 10%, 1000V PAPER.

MODELS	THIS SCHEMATIC APPLIES TO UNITS
LCS-C-2	BEARING SERIAL NO. PREFIX G

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

LAMBDA
ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

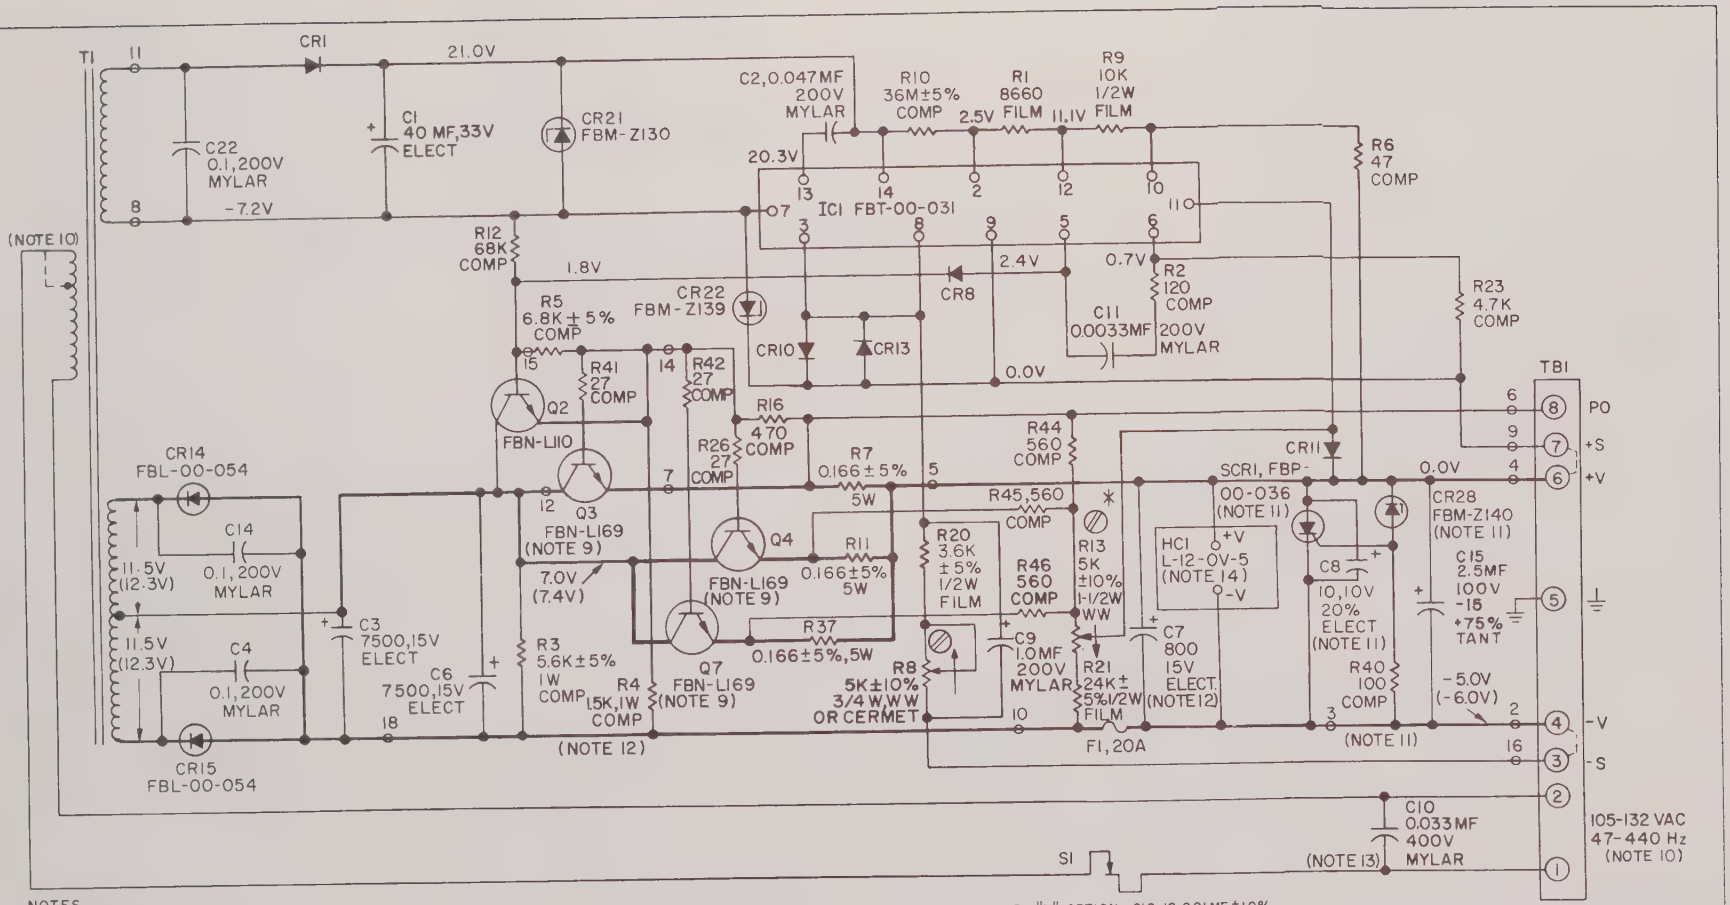

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%; WIREWOUND ±2% FILM ±1%, UNLESS OTHERWISE NOTED
4. CAPACITOR TOLERANCES ELECTROLYTIC -10%, +100%, MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT #FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz, NOM. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED. VOLTAGES IN PARENTHESES APPLY ONLY TO MODEL LCS-C-6. A SINGLE READING APPLIES TO BOTH MODELS.
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. ON UNITS WITH "V" OPTION T1 HAS TAPPED PRIMARY. "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP) OR FOR 205-265V INPUT (USING ENTIRE PRIMARY).
11. C8, CR28, R40 AND SCR1 ONLY USED ON MODEL LCS-C-5-0V WITH SERIAL NO. PREFIX E
12. ON MODEL LCS-C-6; C7 IS 600, 30V, R4 IS 1.8K.
13. ON UNITS WITH "V" OPTION, C10 IS 0.01MF ±10%, 1000V, PAPER.
14. HC1 NOT USED ON UNITS WITH SERIAL NO. PREFIX E.

MODELS
LCS-C-5-0V
LCS-C-6

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES E-G

LAMBDA
ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

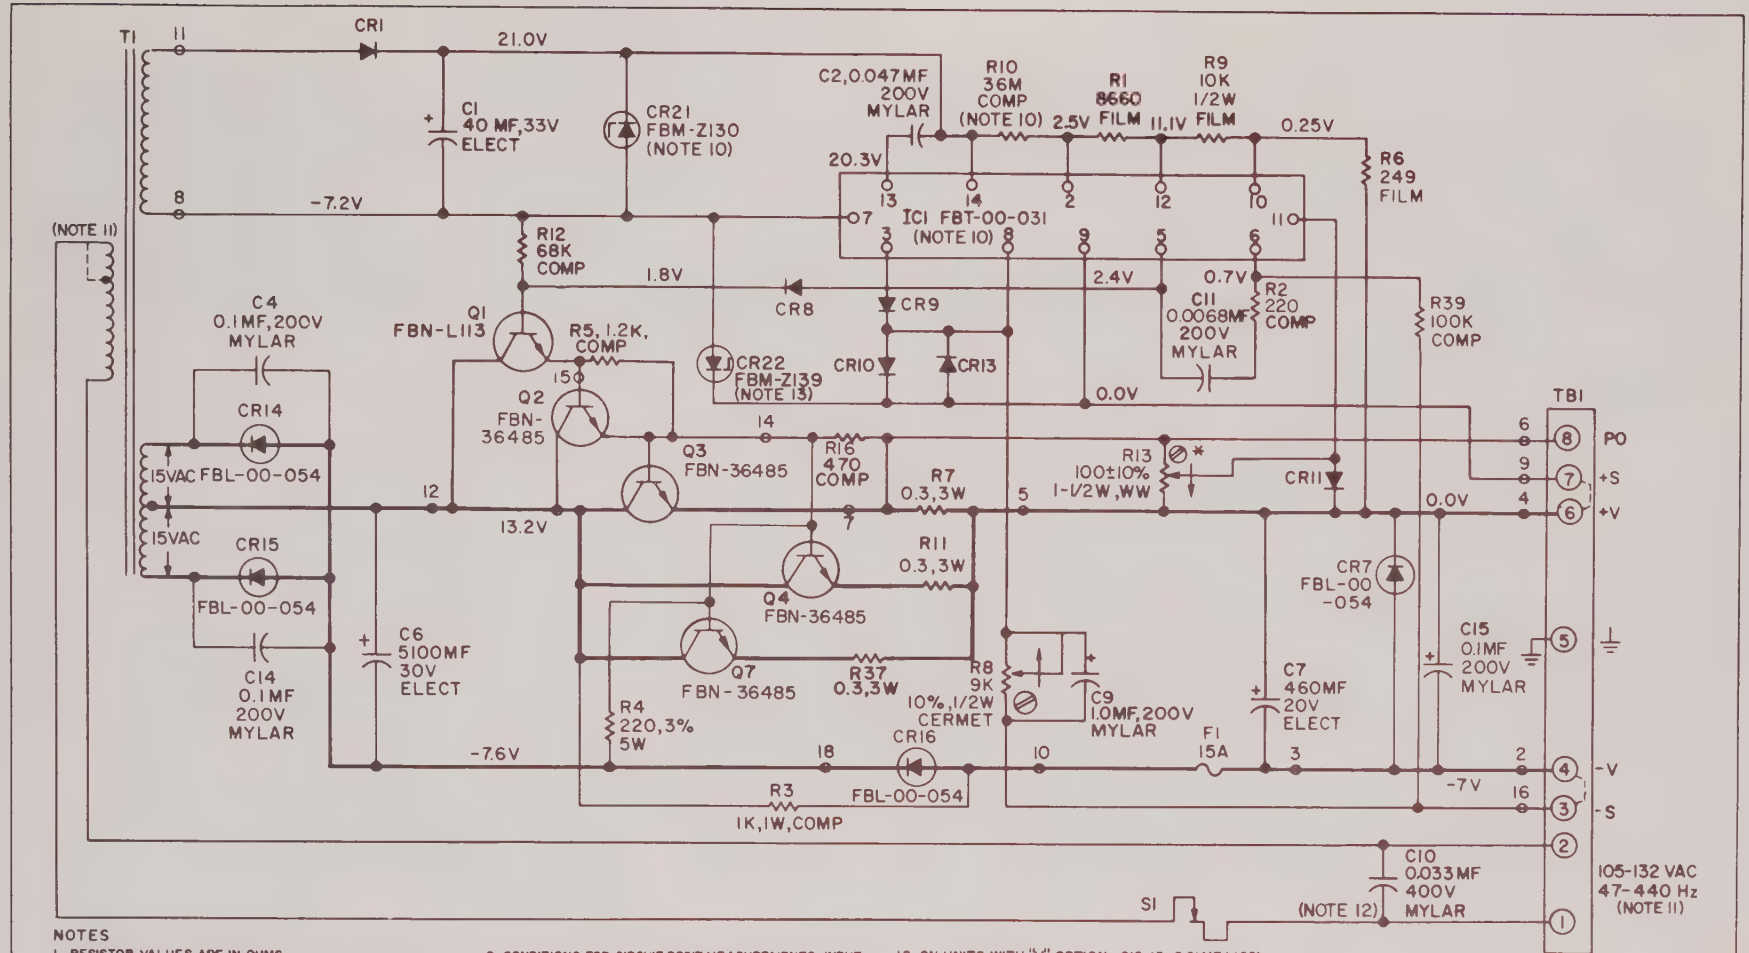

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%; WIREWOUND ±5% FILM ±1%; UNLESS OTHERWISE NOTED
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%; MYLAR ±10%; CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT.# FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT 115 VAC, 60Hz; MAX. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO.340 SILICONE GREASE.
10. ON MODELS WITH SERIAL NO. PREFIX A IC1 IS FBT-00-010, R10 IS 68M AND CR21 IS NOT USED.
11. ON MODEL WITH "V" OPTION, T1 HAS TAPPED PRIM. "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP), OR FOR 205-265V INPUT (USING ENTIRE PRIMARY). ON SERIAL NO. PREFIXES A&B, "V" OPTION UNITS; T1 PRIMARY IS NOT TAPPED. AC INPUT IS 205-265V.
12. ON UNITS WITH "V" OPTION, C10 IS 0.01MF±10%, 1000V, PAPER.
13. CR22 NOT USED ON UNITS WITH SERIAL NO. PREFIXES A-C

MODEL
LCS-C-01

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES A-D

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

LAMBDA
ELECTRONICS
MELVILLE, L. I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

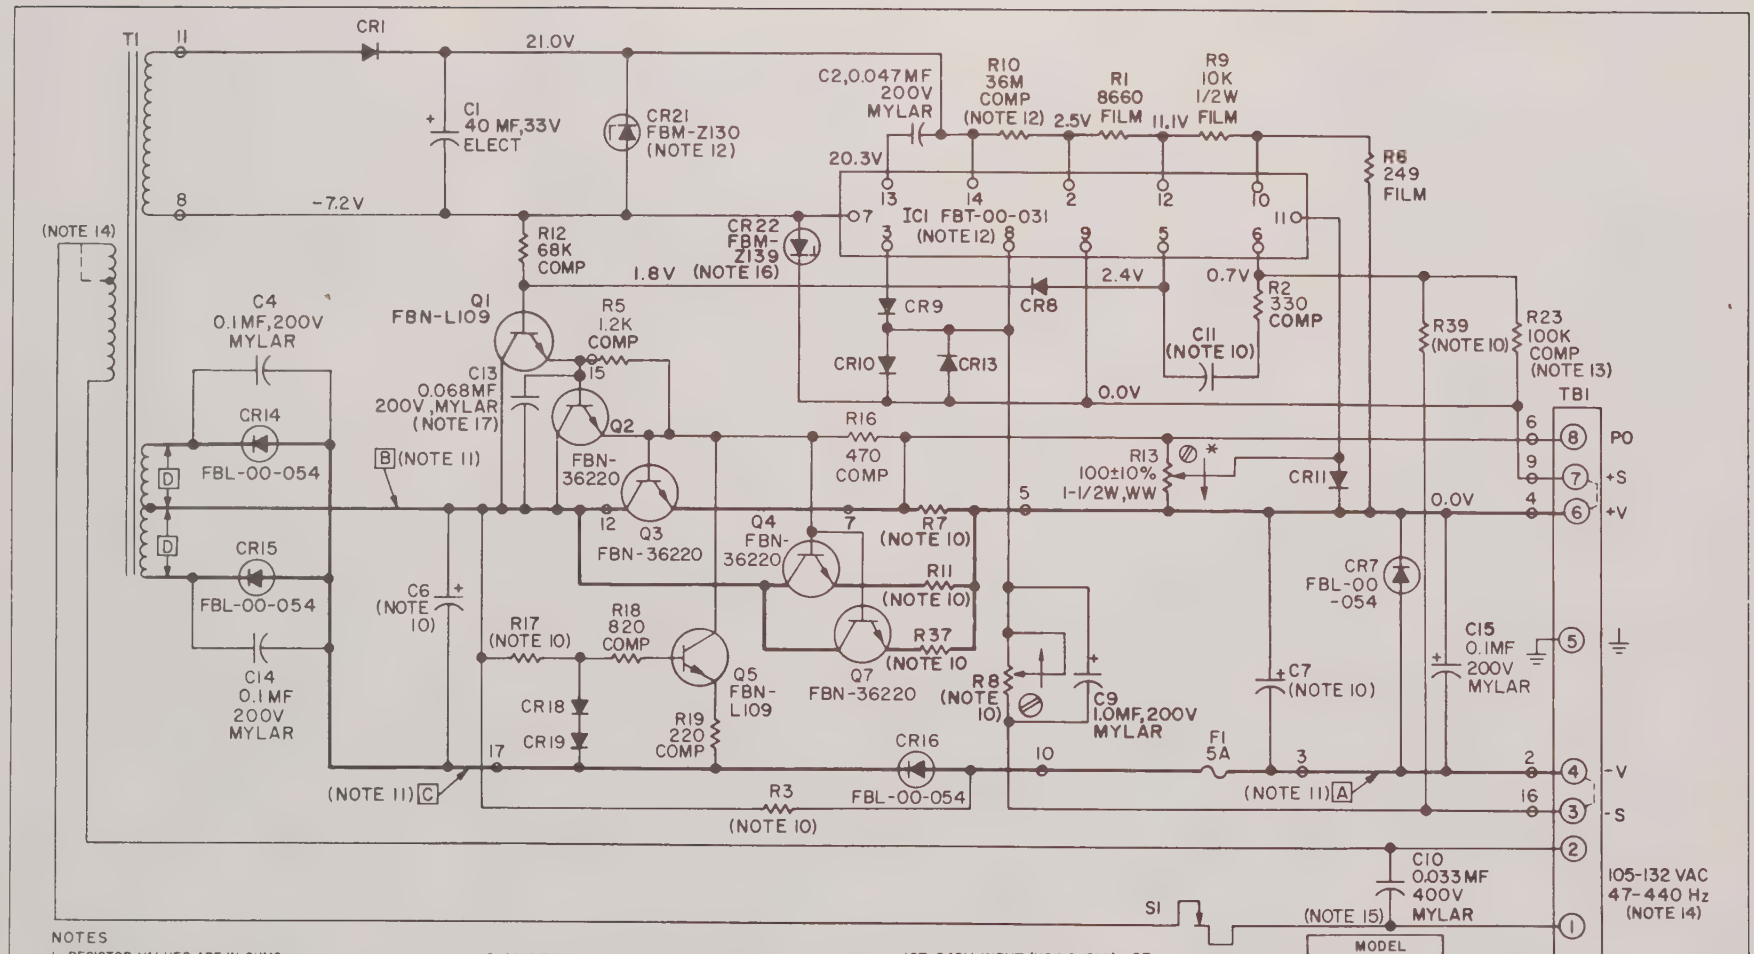

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%; WIREWOUND ±2% FILM ±1%; UNLESS OTHERWISE NOTED
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%, MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT #FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED. INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz; MAX. RATED LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO.340 SILICONE GREASE.
10. SEE TABLE I FOR COMPONENT VALUES.
11. SEE TABLE I FOR VOLTAGE VALUES.
12. ON MODELS WITH SERIAL NO. PREFIX A IC1 IS FBT-00-010, R10 IS 68M AND CR21 IS NOT USED.
13. R23 ONLY USED ON MODEL LCS-C-03.
14. ON UNITS WITH "V" OPTION, T1 HAS TAPPED PRIM. "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP), OR FOR 205-265V INPUT (USING ENTIRE PRIMARY). ON SERIAL NO. PREFIXES A&B, "V" OPTION UNITS; T1 PRIMARY IS NOT TAPPED. AC INPUT IS 205-265V.
15. ON UNITS WITH "V" OPTION, C10 IS 0.01MF±10%, 1000V, PAPER.
16. CR22 NOT USED ON UNITS WITH SERIAL NO. PREFIXES A-C.
17. C13 ONLY USED ON MODEL LCS-C-03.
18. ON UNITS WITH SERIAL NO. PREFIXES A-D: C15 IS 0.1MF, 200V, MYLAR; R2 IS 330; R5 IS 1.2K; Q2, Q3, Q4, Q7 ARE FBN-36220; R16, R26, R39, R44 ARE JUMPERS; R45, R46 ARE NOT USED; R41 IS R16. Q1 IS ONLY USED ON THESE UNITS.
19. UNITS WITH SERIAL NO. PREFIXES FROM E ON ONLY.

MODEL
LCS-C-02
LCS-C-03

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES A-D

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

LAMBDA
ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

TABLE I
SCHEMATIC DATA REFERENCES
MODELS LCS-C-02, LCS-C-03
FOR UNITS BEARING
SERIAL NO. PREFIXES A-D

Model	Schematic Voltage Measurements				Schematic Components					
					C6	C7	R3, R17	R7, R11, R37	R8	R39
	A (Vdc)	B (Vdc)	C (Vdc)	D (Vac)	-10 + 100% ELECT	-10 + 100% ELECT	1W COMP	3W WW	±10% CERMET	±10%, 1/4w COMP
LCS-C-02	-18	17	-18.6	25.5	2700mf 50vdc	220mf 40vdc	3.3K ±5%	0.66 ±5%	23K	100K
LCS-C-03	-32	26	-32.6	41.9	1100mf 75vdc	170mf 50vdc	10K ±10%	0.88 ±2%	40K	220K

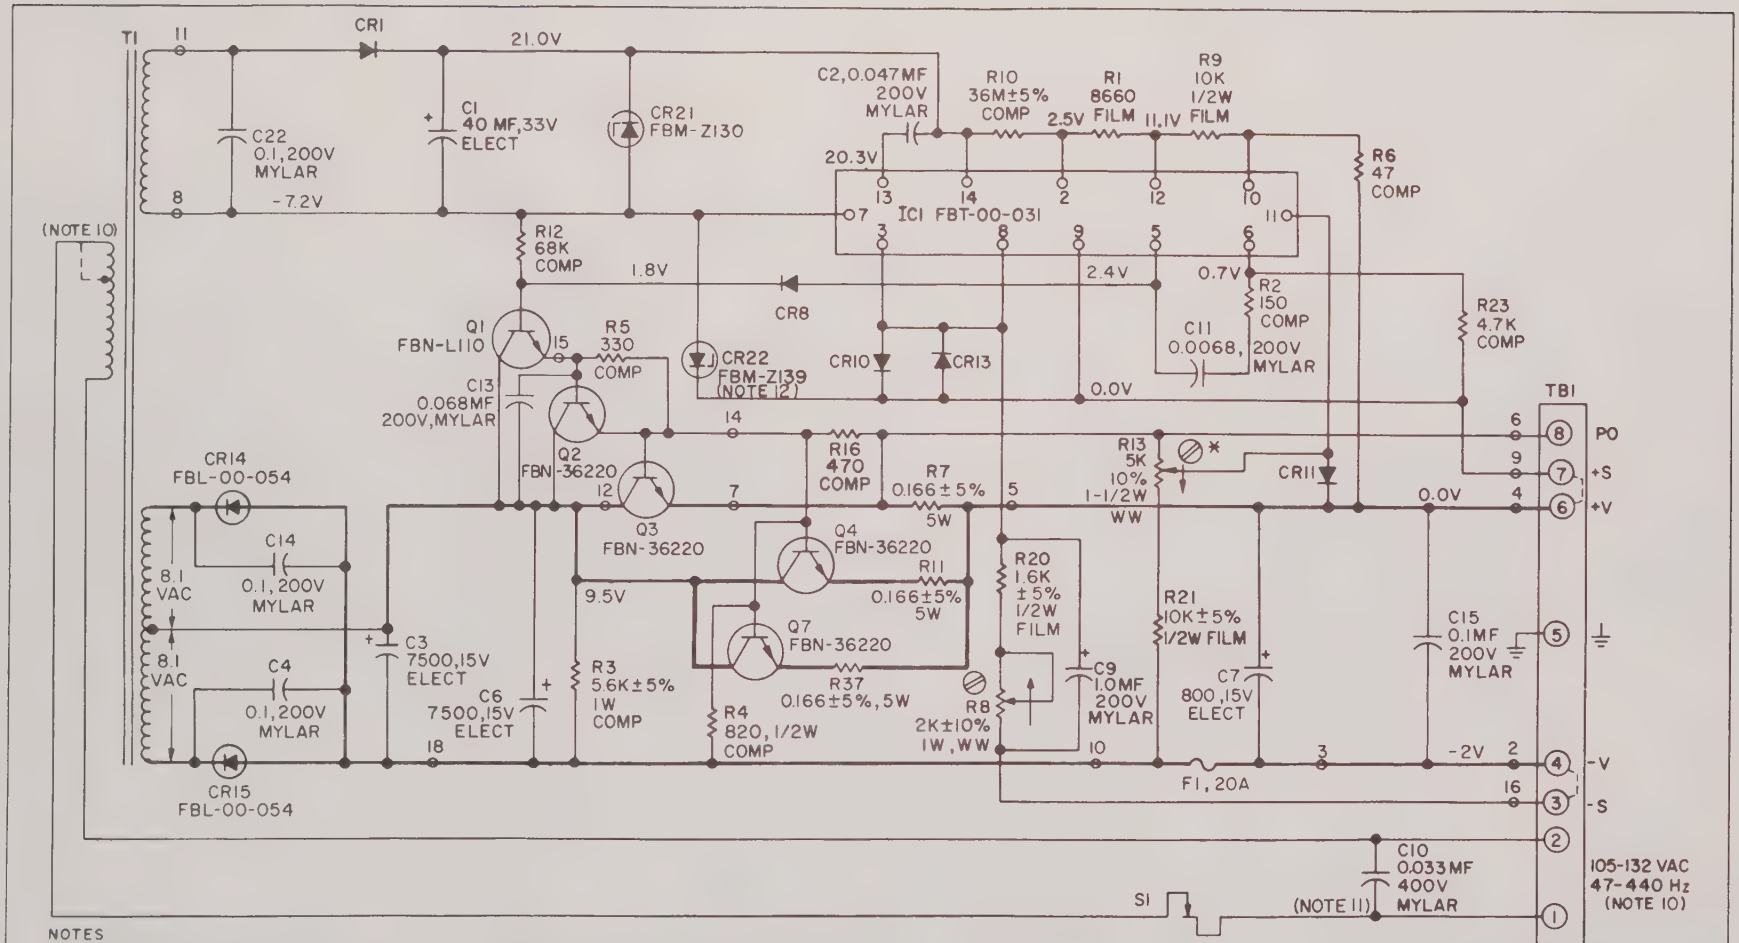

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT, RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%, WIREWOUND ±2% FILM ±1%; UNLESS OTHERWISE NOTED
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%, MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT #FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz, NOM. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED.
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. ON UNITS WITH "V" OPTION T1 HAS TAPPED PRIMARY. "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP) OR FOR 205-265V INPUT (USING ENTIRE PRIMARY).
11. ON UNITS WITH "V" OPTION, C10 IS 0.01MF ±10%, 1000V PAPER
12. CR22 NOT USED ON UNITS WITH SERIAL NO. PREFIX C.

MODELS
LCS-C-2

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES C-F

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

LAMBDA
ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

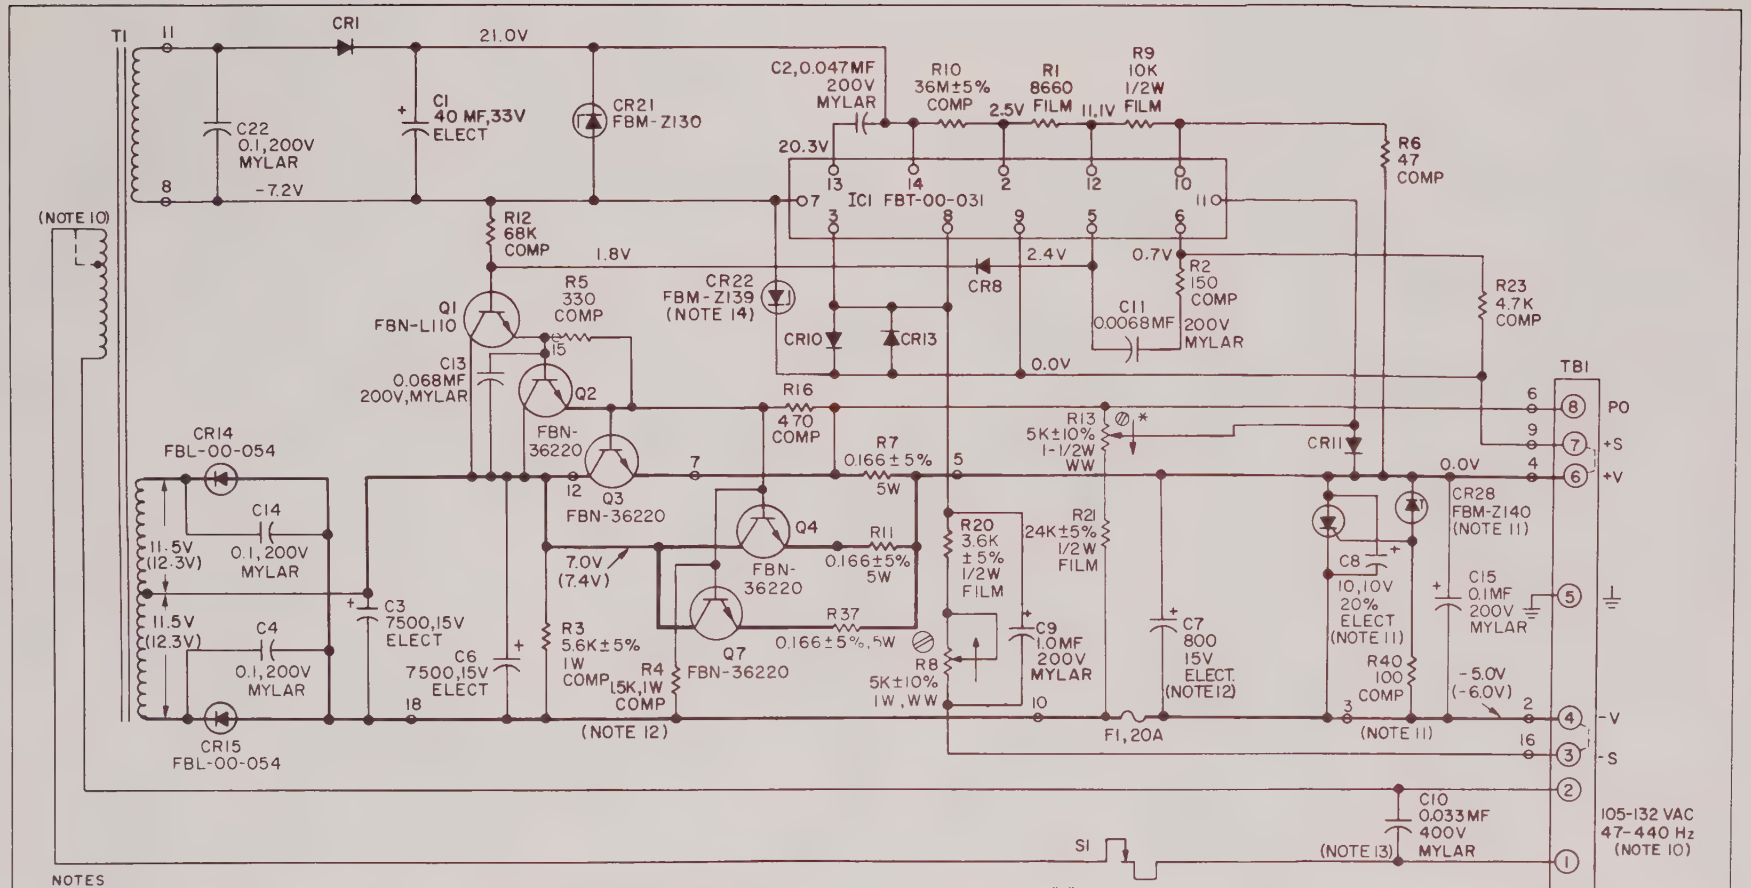

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%; WIREWOUND ±2% FILM ±1%; UNLESS OTHERWISE NOTED.
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%; MYLAR ±10%, CERAMIC 10%, UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT #FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz, NOM. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED. VOLTAGES IN PARENTHESES APPLY ONLY TO MODEL LCS-C-6. A SINGLE READING APPLIES TO BOTH MODELS.
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. ON UNITS WITH "V" OPTION T1 HAS TAPPED PRIMARY. "V" OPTION UNITS CAN BE WIRED FOR 187-242V INPUT (USING TAP) OR FOR 205-265V INPUT (USING ENTIRE PRIMARY).
11. C8, CR28, R40 AND SCR1 ONLY USED ON MODEL LCS-C-5-0V
12. ON MODEL LCS-C-6; C7 IS 600, 30V, R4 IS 1.8K.
13. ON UNITS WITH "V" OPTION, C10 IS 0.01MF ±10%, 1000V, PAPER.
14. CR22 NOT USED ON UNITS WITH SERIAL NO. PREFIX C.

MODELS
LCS-C-5-0V
LCS-C-6

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES C & D

LAMBDA
ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

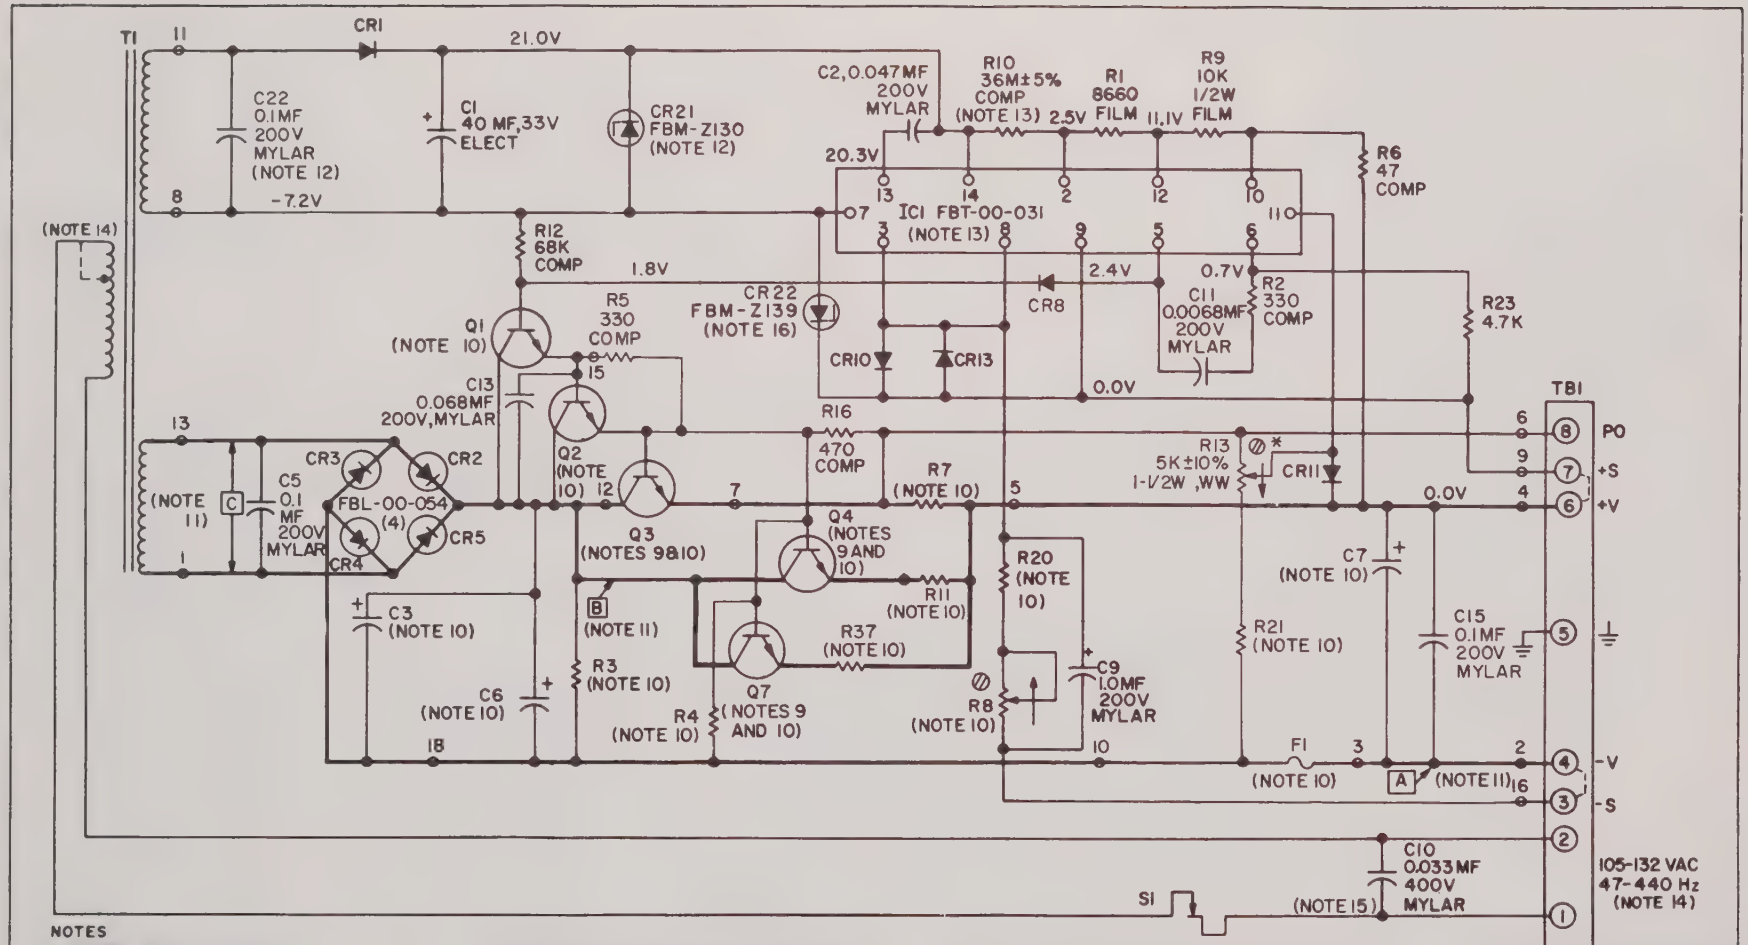

NOTES

1. RESISTOR VALUES ARE IN OHMS
2. RESISTOR WATTAGE 1/4 WATT; RESISTORS ABOVE 2 WATTS ARE WIREWOUND UNLESS OTHERWISE NOTED
3. RESISTOR TOLERANCES: COMP. ±10%; WIREWOUND ±2% FILM 2%; UNLESS OTHERWISE NOTED
4. CAPACITOR TOLERANCES: ELECTROLYTIC -10%, +100%; MYLAR ±10%; CERAMIC 10%; UNLESS OTHERWISE NOTED.
5. SYMBOLS
   - INDICATES CLOCKWISE ROTATION OF SHAFT.
   - INDICATES CONNECTION TO CHASSIS
   - INDICATES ADJUSTMENT OR CALIBRATION CONTROL.
   - SEE INSTRUCTION MANUAL.
   - LAMBDA PT. # FBL-00-030, USE IN 4002 DIODE FOR REPLACEMENT UNLESS OTHERWISE NOTED.
   - INDICATES TERMINAL ON PRINTED WIRING BOARD.
6. DESIGNATION IS LAMBDA PART NUMBER
7. DERATE CURRENT 10% FOR 47-57Hz, FOR 63-440Hz CONSULT FACTORY.
8. CONDITIONS FOR CIRCUIT POINT MEASUREMENTS: INPUT: 115 VAC, 60Hz; NOM. RATED VOLTAGE NO LOAD. INDICATED VOLTAGES ARE TYPICAL VALUES AND ARE DC UNLESS OTHERWISE NOTED. DC MEASUREMENTS TAKEN WITH 20,000 OHMS/V VOLTMETER BETWEEN +S (TERM. 7) & INDICATED POINTS UNLESS NOTED; +S AND +V SHORTED, -S AND -V SHORTED
9. COAT BOTH SIDES OF INSULATING WAFER WITH DOW CORNING NO. 340 SILICONE GREASE.
10. SEE TABLE I FOR COMPONENT VALUES.
11. SEE TABLE I FOR VOLTAGE VALUES.
12. C22 ONLY USED ON MODELS LCS-C-12 AND LCS-C-15.
13. ON MODELS WITH SERIAL NO. PREFIX A IC1 IS FBT-00-010, R10 IS 68M ± 10% AND CR21 IS NOT USED.
14. ON UNITS WITH "V" OPTION, T1 HAS TAPPED PRIMARY. "V" OPTION UNITS CAN BE WIRED FOR 187-242 V INPUT (USING TAP), OR FOR 205-265V INPUT (USING ENTIRE PRIMARY). ON SERIAL NO. PREFIXES A & B, "V" OPTION UNITS; T1 PRIMARY IS NOT TAPPED. AC INPUT IS 205-265V.
15. ON UNITS WITH "V" OPTION, C10 IS 0.01MF ±10%, 1000V, PAPER.
16. CR22 NOT USED ON UNITS WITH SERIAL NO. PREFIXES A-C.

MODELS
LCS-C-12
LCS-C-15
LCS-C-20
LCS-C-24
LCS-C-28

FOR WIRING OF POWER SUPPLY TO LOAD REFER TO POWER SUPPLY-TO-LOAD WIRING DIAGRAMS

DOTTED CONNECTIONS INDICATE JUMPERS IN PLACE FOR LOCAL SENSING "2-WIRE CONNECTION"

THIS SCHEMATIC APPLIES TO UNITS BEARING SERIAL NO. PREFIXES A-D

LAMBDA
ELECTRONICS
MELVILLE, L.I., NEW YORK
DIVISION OF Veeco INSTRUMENTS INC.

TABLE I
SCHEMATIC DATA REFERENCES
MODELS LCS-C-12 THRU LCS-C-28
FOR UNITS BEARING SERIAL NO. PREFIXES A-D

Models	Schematic Voltage Measurements			Schematic Components									
				C3,C6	C7	F1	Q1	R3	R4	R7,R11,R37	R8	R20	R21
	A (Vdc)	B (Vdc)	C (Vac)	-10+100% ELECT	-10+100% ELECT	(AMPS)	*FBN-	1W COMP	±10%, 1W COMP	WW	±10% 1W WW	1/2W FILM	±1%, 1/4W FILM
LCS-C-12	-12	9.7	19.8	5100mf 30vdc	600mf 30vdc	15	L113	5.6K ±5%	3.9K	0.21 ±5% 5W	10K	9.1K ±5%	100K
LCS-C-15	-15	10.1	22.5	5100mf 30vdc	600mf 30vdc	15	L113	5.6K ±5%	3.9K	0.21 ±5% 5W	10K	9.1K ±5%	100K
LCS-C-20	-20	21.2	29.8	2700mf 50vdc	300mf 50vdc	15	L109	10K ±10%	4.7K	0.39 ±5% 3W	20K	15K ±2%	100K
LCS-C-24	-24	21.6	32.9	2700 mf 50vdc	300mf 50vdc	10	L109	10K ±10%	12K	0.39 ±5% 3W	20K	15K ±2%	100K
LCS-C-28	-28	26.0	38.9	1600mf 60vdc	300mf 50vdc	10	L109	10K ±10%	12K	0.50 ±5% 3W	20K	24K ±5%	120K

*Lambda part number

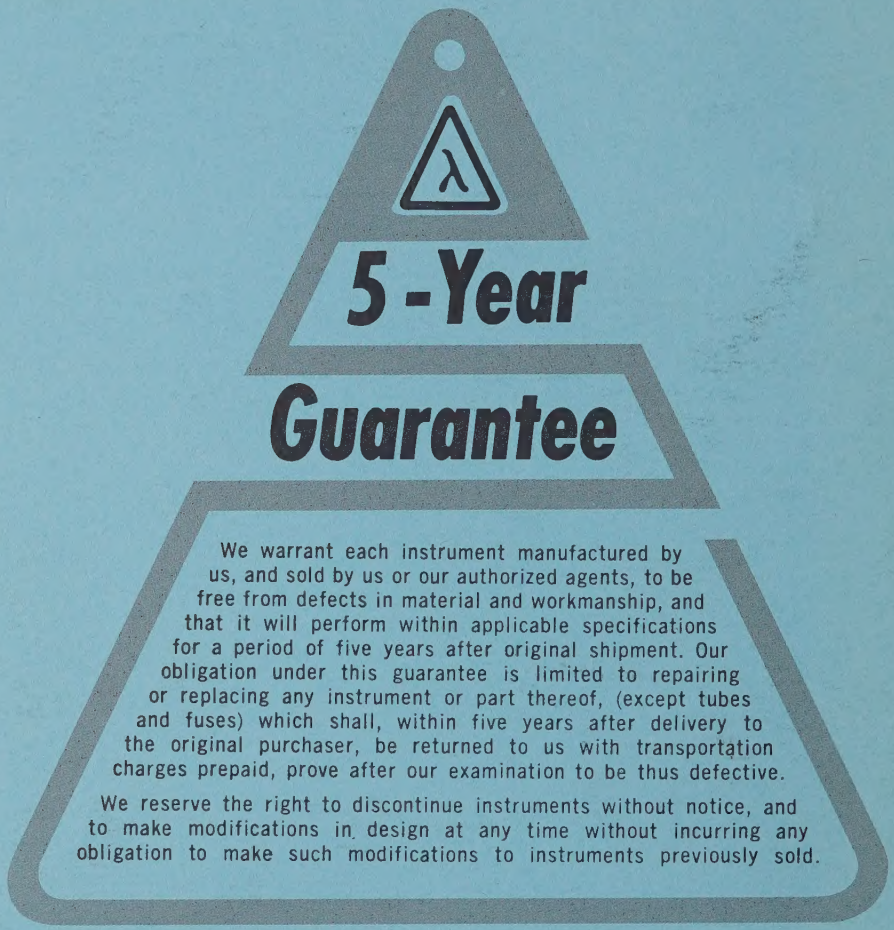
5 - Year
Guarantee
We warrant each instrument manufactured by us, and sold by us or our authorized agents, to be free from defects in material and workmanship, and that it will perform within applicable specifications for a period of five years after original shipment. Our obligation under this guarantee is limited to repairing or replacing any instrument or part thereof, (except tubes and fuses) which shall, within five years after delivery to the original purchaser, be returned to us with transportation charges prepaid, prove after our examination to be thus defective.
We reserve the right to discontinue instruments without notice, and to make modifications in design at any time without incurring any obligation to make such modifications to instruments previously sold.

LAMBDA ELECTRONICS
515 BROAD HOLLOW ROAD • MELVILLE, L. I., NEW YORK • 516 MYRTLE 4-4200

DIVISION of Veeco INSTRUMENTS INC.

www.manualsplus.com
1007932